

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:


Corner originally established by Henry Meldrum under GLO Contract No. 450, dated June 11, 1882. Surveyor General field notes states:

Set a post 3 ft long 3 ins sq. 24 ins in ground for 1/4 sec. cor marked 1/4 S on W face 100 ft above creek, from which:

A fir 7 ins. in dia. bears S58°W 35 lks. dist marked 1/4 S BT.

A fir 10 ins. In dia. bears N8°E 47 lks. dist marked 1/4 S BT.

T 1 S R 40 E L-09



DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a 2 1/2" iron pipe with a 2 1/2" brass cap marked as shown below, 6" above ground in a collar of stone 2 1/2 feet in diameter. From which:

A 17" Western Larch bears North 79° East, a distance of 8.70 feet, alive and vigorous with a healed blaze (bearing tree tag attached).

A 24" stump bears North 22° West, a distance of 13.40 feet (bearing tree tag attached).

No record of monumentation found.

See Survey No. 014-2015

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

From the iron pipe monument

NEW BEARING OBJECTS:

A 5/8" iron rod bears South 72°34' East, a distance of 29.54 feet, with a 1 1/2" aluminum cap marked BGB SURVEY MARKER SE RP.

A 5/8" iron rod bears South 23°13' West, a distance of 23.52 feet, with a 1 1/2" aluminum cap marked BGB SURVEY MARKER SW RP.


A 6" White Fir bears North 23° West, a distance of 16.85 feet, marked 1/4 S17 BT.

I hereby certify that this corner was perpetuated on March 3, 2015.

Witness: Thomas J. Kopp



Renewal Date: June 30, 2015

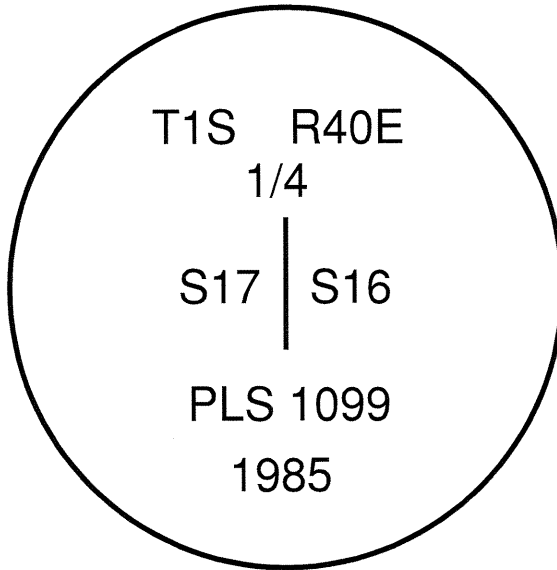

UNION COUNTY SURVEYOR
Date Received 3/11/15
Date Filed 3/11/15
Filed By [Signature]
File Number 077-2015R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 16° East declination, the distances are to a 60d spike driven into the right side of the root crown of the new bearing tree. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing tree. Bearing and distances to the iron pin accessory were determined by GPS observation with a Leica GS-15 unit. The Basis of Bearing is that of Union County Survey Number 014-2015.

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 201518

1/4 SECTION CORNER COMMON TO SECTIONS 16 AND 17

TWP. 1 S. RGE. 40 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: March 16, 2015

LAT: 45 ° 28 ' 42.75721 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 117 ° 49 ' 46.04063 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 671883.973 INT FT.

E: 8886964.729 INT FT.

TYPE: GPS

THETA: 1 ° 53 ' 38.0855516 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999091789

ELEV: 3689.45 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

2 1/2" brass cap monument marked as
shown in mound of stone



REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson
OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2016

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)