


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Henry Meldrum under GLO contract Number 450, dated June 11, 1882. Surveyor General record states:
 Set 18x8x6 in. basalt stone from which:
 A Pine 5" dia. bears S20°W, 141 lks.
 A Pine 4" dia. bears N58°E, 39 lks.

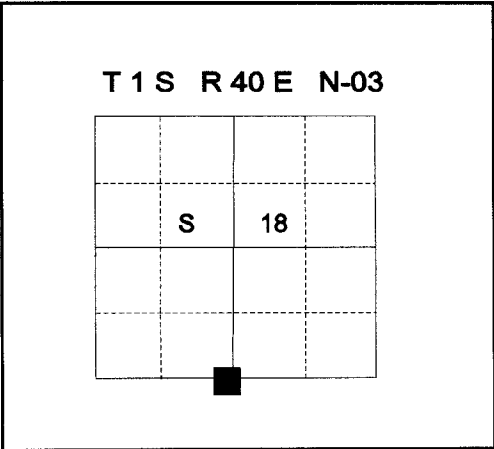

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

No evidence of the bearing trees or stone was found.

See Union County Survey 025-1996

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the proportioned position I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown below, 24" in the ground with mound of stone 3 ft. diameter, from which:

- A 21" Ponderosa Pine bears N66°E, 55.28 feet, marked X BT.
- A 16" Ponderosa Pine bears S19°E, 18.89 feet, marked 1/4 S19 BT.
- A 22" Ponderosa Pine bears S21°W, 35.88 feet, marked X BT.
- A 15" Ponderosa Pine bears N65°W, 31.91 feet, marked 1/4 S18 BT.

I hereby certify that the corner was monumented on June 24, 1996.
 Witness: Mark Durbin, Jeff Madsen


REGISTERED
PROFESSIONAL
LAND SURVEYOR

Jeffery P. Petersen

OREGON
JULY 20, 1993

JEFFERY P. PETERSEN
2625

Renewal Date: December, 31 1996

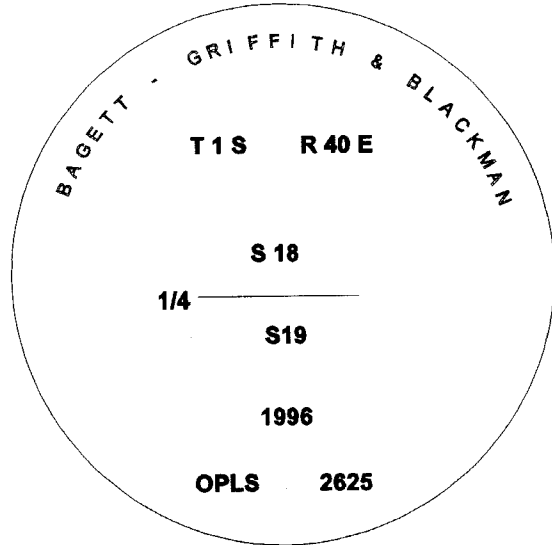

**UNION COUNTY
SURVEYOR**

Date Received 7-29-96

Date Filed 7-31-96

Filed By R. ROBINSON, Deputy

File Number 081-1996R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 2625 is attached to the BT blaze.