

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHED:**

Corner originally established by Henry Meldrum, Deputy Surveyor under GLO Contract No. 450, dated June 11, 1882. Surveyor General's field notes state:


Set a basalt stone 18x8x5 ins. 12 ins. in ground for 1/4 sec. cor. marked 1/4 on N face from which:

- A pine 30 ins. in dia. bears S47°W 24 lks. dist - marked 1/4S BT.
- A pine 30 ins. in dia. bears N40°E 18 lks. dist - marked 1/4S BT.

In 1980, James Hambleton brings this corner up to modern standards with the aid of the bearing trees and found stone at assumed corner location. Monumentation Records states:

I set a 2" galv. iron pipe 30" long with a brass cap, 4" above the surface, in a mound of stone, with cap stamped as shown below. I set two new bearing trees:  
 An 18" pine bears N 42 00 E, 10.0 feet and scribed 1/4 S BT.  
 A 10" pine bears S 65 00 W, 29.15 feet and scribed 1/4 S BT.

T 1 S R 40 E J-15



**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found a 2 1/2" iron pipe with brass cap, marked as shown below, flush with ground and in a collar of stone 2 foot diameter. From which:

A 23" Ponderosa Pine alive and vigorous with a healed blaze, bears North 42° East, a distance of 9.55 feet. (Measured from a 60d nail driven in the center right side of root crown)

SEE SURVEY NUMBER 018-2015

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

From the iron pipe monument

**NEW BEARING OBJECTS:**


- A 3" Douglas Fir bears South 18° East, a distance of 14.95 feet, marked X BT.
- A 12" Ponderosa Pine bears South 83° West, a distance of 53.10 feet, marked 1/4 S15 BT.
- A 5" White Fir bears North 65° West, a distance of 55.75 feet, marked 1/4 S10 BT.

I hereby certify that the corner was perpetuated on March 10, 2015.

Witness: Thomas J. Kopp



Renewal Date: June 30, 2015

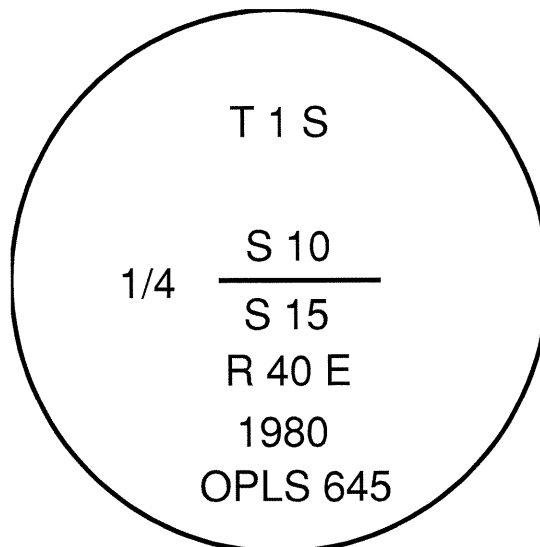

**UNION COUNTY SURVEYOR**

Date Received 3/20/15

Date Filed 3/20/15

Filed By [Signature]

File Number 080-2015R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 16° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.