

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**


**HISTORY OF ORIGINAL CORNER ESTABLISHED:**

Corner originally established by Henry Meldrum, Deputy Surveyor under GLO Contract No. 450, dated June 11, 1882. Surveyor General's field notes state:

Set a basalt stone 18x12x4 ins. 12 ins. in ground for corner to secs. 14, 15, 22 & 23. 75 ft above lake - marked with 3 notches on S and 2 notches on E edges from which:

- A pine 40 ins. in dia. bears N52°E 26 lks. dist - marked T1N S14 BT
- A fir 12 ins. in dia. bears N43°W 62 lks. dist - marked R40E S15 BT
- A tamarack 9 ins. dia. bears S46°W 95 lks. dist - marked S22 BT
- A pine 44 ins. in dia. bears S43°E 20 lks. dist - marked S23 BT

T 1 S R 40 E N-17



**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found original Southeast bearing tree, a 39" diameter Pine snag with scribe marks "BT" visible. No other evidence found.

See Survey Number 018-2015

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At record bearing and distance from the found bearing tree (N43°W, 20lks), I set a 2 1/2" x 30" aluminum pipe with a 2 1/2" aluminum cap marked as shown below, 20" in the ground with a mound of stone 2 foot diameter to top of cap. From which:

**NEW BEARING OBJECTS:**


- A 9" Ponderosa Pine bears North 59° East, a distance of 24.45 feet, marked T1S R40E S14 BT.
- A 15" Ponderosa Pine bears South 65° East, a distance of 11.30 feet, marked T1S R40E S23 BT.
- A 9" Ponderosa Pine bears South 45° West, a distance of 25.70 feet, marked T1S R40E S22 BT.
- A 10" Douglas Fir bears North 79° West, a distance of 8.75 feet, marked T1S R40E S15 BT.

Set a steel fencepost approx. 1 foot North of corner monument. I hereby certify that the corner was monumented on March 13, 2015.

Witness: Thomas J. Kopp



Renewal Date: June 30, 2015

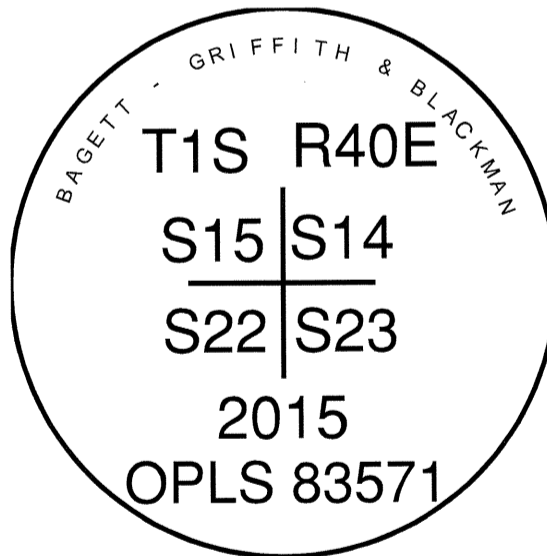

**UNION COUNTY SURVEYOR**

Date Received 3/20/15

Date Filed 3/20/15

Filed By [Signature]

File Number 085-2015R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 16° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees (left side of Southwest tree). A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.