


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

None

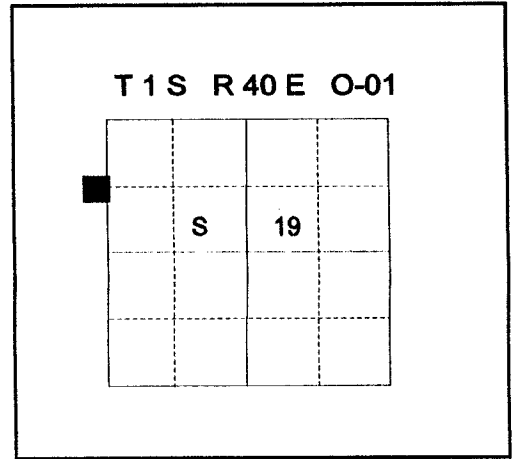

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

None

See Union County Survey 034-1996

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the proportioned position I set a 2½" x 30" aluminum pipe with 2½" aluminum cap marked as shown below, 20" in the ground, with mound of stone 2 ft. dia. to top of cap, from which:

NEW BEARING TREES:

- A 14" Tamarack bears N47°W, 13.00 feet, marked N 1/16 S24 BT.
- A 14" Tamarack bears N72°E, 33.02 feet, marked N 1/16 S19 BT.


I hereby certify that the corner was monumented on August 13, 1996.
Witness: Mark Durbin, Jeff Madsen

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Jeffery P. Petersen

OREGON
JULY 20, 1993
JEFFERY P. PETERSEN
2625

Renewal Date: December, 31 1996

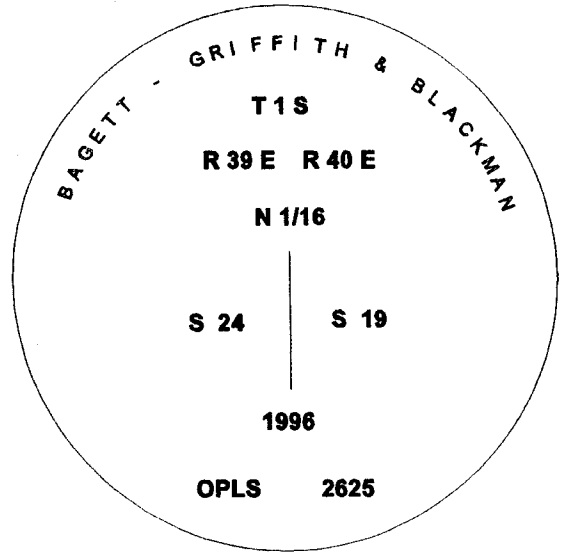

**UNION COUNTY
SURVEYOR**

Date Received 8-15-96

Date Filed 8-15-96

Filed By R. Robinson, Deputy

File Number 092-1996R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. Attached brass washer marked OPLS 2625 to the BT blaze.