


C L I F I E D R E C O R D O F L A N D C O R N E R M O N U M E N T . O N

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Henry Meldrum under GLO contract Number 450, dated June 11, 1882. Surveyor General record states:

T 1 S R 40 E P-05

Set post 3 ft. long 3 in. square 24 in. in ground for 1/4 Sec. Cor. marked 1/4 S on W face, from which:

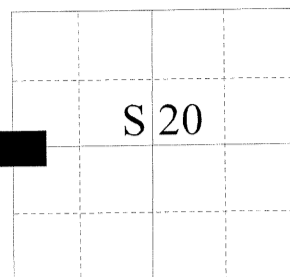

A pine, 4 in. diam. bears S. 66° E., 19 lks. dist. marked 1/4 S. B. T.
A tamarack, 24 in. diam. bears N. 82° W., 22 lks. dist. marked 1/4 S. B. T.

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

No evidence found.


See Union County Survey 026-2012

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown below, 28" in the ground with a mound of stone one foot base to top of cap from which:

- A 10 inch Lodgepole Pine bears North 9° East, a distance of 58.61 feet, marked 1/4 S20 BT.
- A 13 inch Grand Fir bears South 42° East, a distance of 2.65 feet, marked 1/4 S20 BT.
- A 4 inch Ponderosa Pine bears South 36° West, a distance of 14.70 feet, marked X BT.
- A 6 inch Ponderosa Pine bears North 65° West, a distance of 13.43 feet, marked 1/4 S19 BT.

I hereby certify that the corner was monumented on July 25, 2012
Witness: Rick Robinson

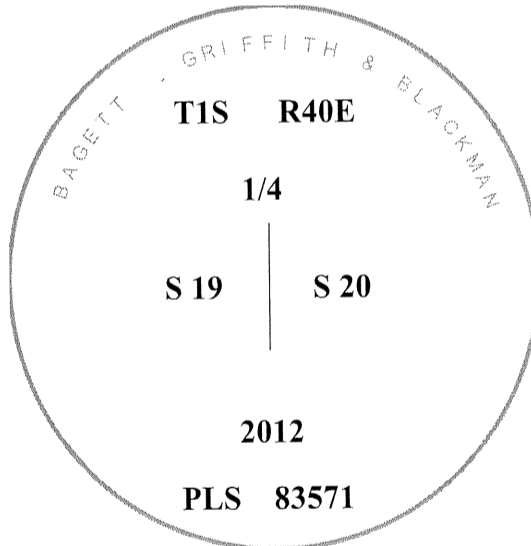

UNION COUNTY SURVEYOR

Date Received 7/27/12

Date Filed 7/27/12

Filed By R. Robinson, Deputy

File Number 024-2012R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 16° East declination, the distances are to a 60d spike driven into the root crown of the bearing tree. A brass washer marked OPLS 83571 is attached to the BT blaze.