


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Henry Meldrum under GLO contract Number 450, dated 1882. Surveyor General record states:

Set post 4 ft long 4 in square 24 in. in ground for cor to secs 20, 21, 28, 29 marked T.1. S.21on NE.R40E S20 on NW S29 on SW and S28 on SE with 4 notches on E and 2 on S edges from which,
A Pine 10 ins dia bears N 75°E 49 LKS dist marked T.1. S. S. 21, B.T. A pine 7 ins dia bears N 67° W 26 LKS dist marked R,40,E. S.20, B.T. A pine 16 ins dia bears S 31°W 14 LKS dist marked S29 B.T. A pine 22 ins dia bears S41° E 36 LKS dist marked S 28 B.T.

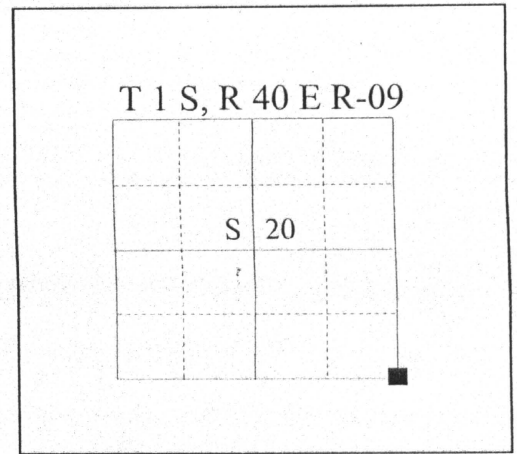

DESCRIPTION OF CORNER EVIDENCE FOUND:
None

See Survey No. 042-2004

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the proportionate position determined by survey, I set a 2½" x 30" aluminum monument with aluminum cap marked as shown, 27 inches in the ground from which:

BEARING TREES:

An 11" Larch bears N 48°E a distance of 62.59 feet, marked T1S R40 S21 BT.

An 8" White Fir bears N 82°E a distance of 28.47 feet, marked T1S R40E S28 BT. (no other trees available in SE Quadrant, marked tree in S21 as if in S28)

A 6" Western Larch bears S 78°W a distance of 30.93 feet, marked T1S R40E S20 BT. (no other tree within S20 for reference, marked this tree for NW Quadrant)

A 7" White Fir bears S 39°W, a distance of 19.19 feet, marked X BT.


I hereby certify that the corner was monumented on December 4, 2004
Witnesses: Mike Spicer, Greg Blackman Jr.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 13, 1973

GREGORY T. BLACKMAN
991

Renewal Date: December 31, 2005

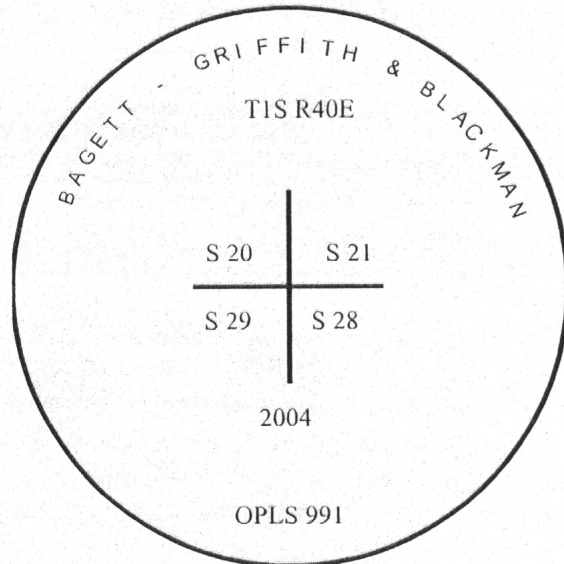

UNION COUNTY
SURVEYOR

Date Received 12/30/04

Date Filed 12/30/04

Filed By R. Robinson, Deputy

File Number 103-2004R

I used a steel tape and magnetic compass in the establishment of new accessories. The magnetic declination used was 18° East. The distance to the bearing tree is to a 50d spike driven in the right side of the tree at the root crown. I attached a brass washer marked OPLS 991 to the BT blaze.

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200426

SECTION CORNER COMMON TO SECTIONS 20, 21, 28 and 29

TWP. 1 S. RGE. 40 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: December, 2004

LAT: 45 ° 27 ' 24.47269 " N

SURVEYOR: GREGORY T. BLACKMAN
OPLS 991

LONG: 117 ° 49 ' 45.84533 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 Adams Avenue
La Grande, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 663960.237 INT FT.

E: 8887240.672 INT FT.

TYPE: GPS

THETA: 1 ° 53 ' 38.2240561 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999072002

ELEV: 4117.83 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

2 1/2" Aluminum monument marked:

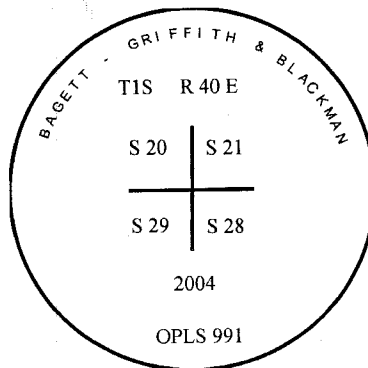

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973

GREGORY T. BLACKMAN
991

Renewal Date: December 31, 2005

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)