

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


Index File No. R-25

History of original corner establishment:

Original corner established in 1882 by H. Meldrum under contract #450

He set a post from which:

- A 16" White Fir bears N48°E, 33 lks.
- A 10" White fir bears N78°W, 18 lks.
- A 6" White Fir bears S20°W, 22 lks.
- An 30" White Fir bears S48°E, 27 lks.

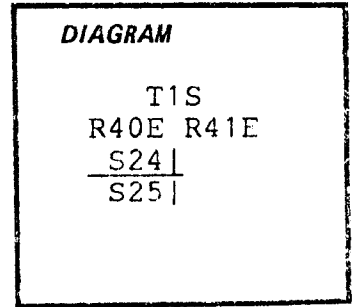

Note: Alonzo Gesener stated in 1898 when he resurveyed the range line he chopped out the marks referring to sections 19 & 30.

Description of corner evidence found:

No corner monument found. Found badly decayed stump 30-35" in diameter bearing S48°E, 27 lks (17.8 ft.) with chop marks facing northwest.

Description of monument and accessories established to perpetuate the original location of this corner:

Cap is stamped:

- Set 2½"x30" aluminum capped aluminum pipe rising 6" above ground.
- Set steel fencepost 3' north of corner.

T1S T1S
S24 R41E
 S25
 R40E
 RLS 1848
 1986

New BT's:

- A 8½" W. Larch bears N78°W, 35.8 ft. blazed&scribed T1SR40ES24BT
- A 10" W. Fir bears S62½°W, 25.2 ft. blazed&scribed T1SR40ES25BT

Painted blazes and attached signs as required in Specifications for Cadastral Surveys, USFS Region 6, March, 1982.

Corner is found by taking USFS Rd. #6100-649 southerly and westerly from 6200-470, 0.4 mile to where the road turns and goes straight south. Corner is 250 ft. West of road.

Compass Declination: 19½°E
Witness: J. Sutton

I hereby certify that the above described corner monument and/or accessories was perpetuated as hereon described on Aug 23, 1986.



| |
|-------------------------------|
| UNION COUNTY SURVEYOR |
| Date Received <u>11-21-86</u> |
| Date Filed <u>11-26-86</u> |
| By <u>G. LANGRISH DEPUTY</u> |
| File No. <u>269-86 R</u> |

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)