

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:
None

No record of further monumentation found
in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:
NONE

See Survey Number 042-2004

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by the survey I set a
5/8" x 30" rebar with 2 1/2" aluminum cap 30 inches
in the ground, marked as
shown, from which:


NEW BEARING OBJECTS AND TREES:

An 8 inch Dia. White Fir bears N 80°E, a distance of 5.00
feet, marked CW 1/16 S28 BT

A 10 inch Dia. White Fir bears S 10°W, a distance of 5.85 feet,
marked X BT

I hereby certify that the corner was monumented on December 22, 2004.
Witnesses: Mike Spicer, Greg Blackman Jr.

T 1 S R 40 E T-10

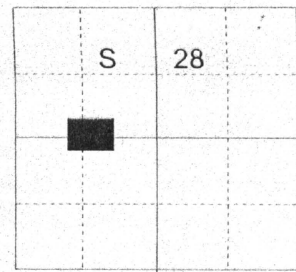


REGISTERED
PROFESSIONAL
LAND SURVEYOR

Greg T. Blackman

OREGON
JULY 13, 1973

GREGORY T. BLACKMAN
991

Renewal Date: December 31, 2005

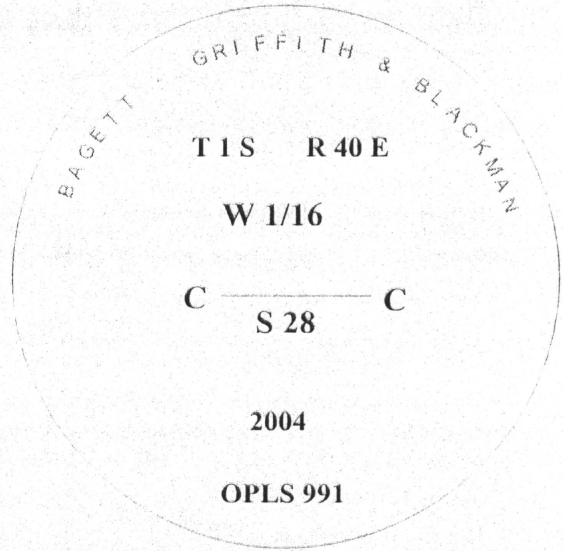

UNION COUNTY
SURVEYOR

Date Received 12/30/04

Date Filed 12/30/04

Filed By R. Robinson, Deputy

File Number 106-2004R

I used a steel tape and magnetic compass in
the establishment of new accessories. The
magnetic declination was 18° East. The
distance to the bearing tree is to a 50d
spike driven in the right side of the tree at
the root crown. I attached a brass washer
marked OPLS 991 to the BT blaze.