

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


HISTORY OF ORIGINAL CORNER ESTABLISHMENT:
Corner Not originally set.

DESCRIPTION OF CORNER EVIDENCE FOUND:
None

See Survey No. 042-2004

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by survey, I set a 2½"
x 30" aluminum monument with aluminum cap marked
as shown, 27 inches in the ground from which:

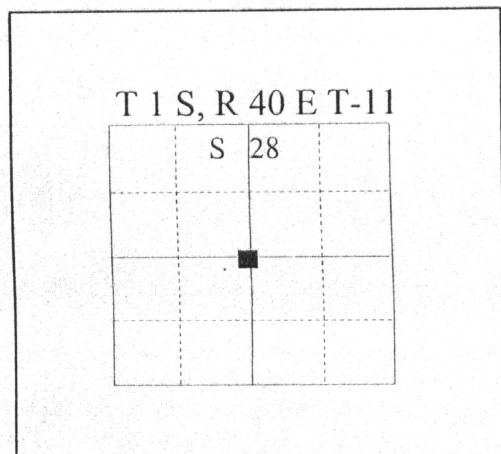

BEARING OBJECTS:

A 9" White Fir bears N 12°E a distance of 37.98 feet, marked C 1/4 S28 BT.

A 6" Ponderosa Pine bears S 13°E a distance of 65.09 feet, marked X BT.

A 14" Larch bears S 39°W a distance of 64.54 feet, marked C 1/4 S28 BT.


A 9" White Fir bears S 80°W a distance of 78.98 feet, marked C 1/4 S28 BT.

I hereby certify that the corner was monumented on December, 2004
Witnesses: Mike Spicer, Greg Blackman Jr.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Greg T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

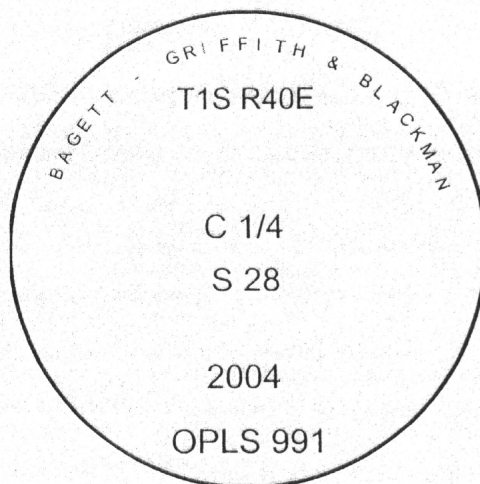

Renewal Date: December 31, 2005

**UNION COUNTY
SURVEYOR**

Date Received 12/30/04

Date Filed 12/30/04

Filed By R. ROBINSON, Deputy

File Number 110-200412

I used a steel tape and magnetic compass in the establishment of new accessories. The magnetic declination used was 18° East. The distance to the bearing tree is to a 50d spike driven in the right side of the tree at the root crown. I attached a brass washer marked OPLS 991 to the BT blaze. Distance to the bearing object is to the center of the aluminum cap.