


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. **U-19**

History of original corner establishment:

None.

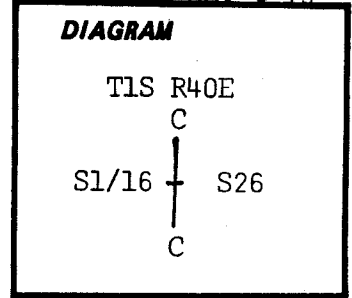


Description of corner evidence found:

None.

Description of monument and accessories | established to perpetuate the original location of this corner:

At surveyed point set 1 1/4" x 30" galvanized pipe and brass cap marked: Set pipe 25" in the ground. From which by magnetic declination of N20°E:
 A 16" Fir bears S52°E., 37.8 ft. scribed CS1/16S26 BT.
 A 16" Fir bears N17°E., 35.9 ft. scribed CS1/16S26 BT.
 Painted blazes red and 6" red band around. Placed 54-3s and brass washers stamped PLS 1051 on BTs. Placed 54-4 on a steel fence post 5' north of the corner.



I hereby certify that the above corner monument was established as herein described.

Witnesses: Daniel Rowland
Troy Phillips

July 30, 1981

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Barry B. Barbour
 OREGON
 OCT. 17, 1975
 BARRY B. BARBOUR
 1051

Office of..... County Surveyor..... County of..... Union.....

State of... Oregon....., I hereby certify that the within instrument was filed in this office

for record on the 10th day of... August....., 1981

HOWARD L. PERRY
(COUNTY OFFICIAL)

by *Ray J. Langhitt*
(DEPUTY)

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____

By _____

File No. **182-84 R**