


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

No previous history.

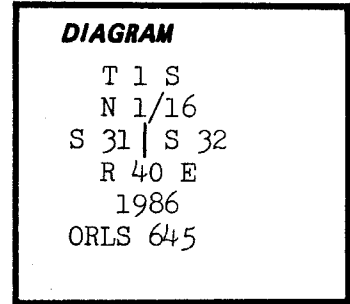

Description of corner evidence found:

Found old fence corner approximately 20 feet east of true corner location.

Description of monument and accessories I established to perpetuate the original location of this corner:

I set a Brass Cap on a 2 in. x 30 in. galvanized iron pipe set with in 3 in. of the surface, from which I set two bearing trees:

A Larch 12 in. dia., bears N 28 50 W, 59.15 feet (Horiz. dist.) and being scribed N 1/16 S 31 BT.

A Larch 13 in. dia., bears N 32 19 E, 19.10 feet (Horiz. dist.) and being scribed N 1/16 S 32 BT.

UNION COUNTY SURVEYOR
Date Received <u>12-12-86</u>
Date Filed <u>12-22-86</u>
By <u>G. LANGLITZ DEPUTY</u>
File No. <u>312-86 R</u>

REGISTERED PROFESSIONAL LAND SURVEYOR
<i>James H. Hambleton</i>
<u>12-10-86</u>
OREGON JULY 10, 1964 JAMES H. HAMBLETON 645

SEE SURVEY 37-86

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)