

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

None


DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE

See Survey Number 039-2004.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 5/8" x 30" rebar with 2 1/2" aluminum cap marked as shown below, 28" in the ground, from which:

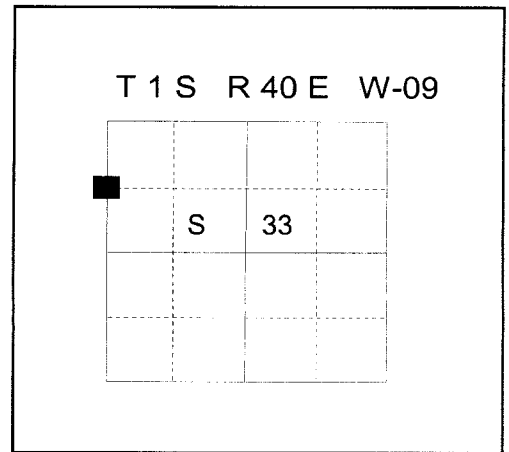

NEW BEARING TREES:

A 13" diameter Douglas Fir bears N 75°E, a distance of 17.50 feet, marked N 1/16 S33 BT

A 10" diameter Douglas Fir bears N 53°W, a distance of 45.67 feet, marked N 1/16 S32 BT.

I hereby certify that the corner was monumented on December 3, 2004.
Witnesses: Mitch Williams.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973

GREGORY T. BLACKMAN
991

Renewal Date: December 31, 2005

BAGETT - GRIFFITH & BLACKMAN

T1S R40E

N1/16

S32 | S33

2004

OPLS 991

**UNION COUNTY
SURVEYOR**

Date Received 12/30/04

Date Filed 12/30/04

Filed By R. Robinson, Deputy

File Number 117-2004R

I used a steel tape and magnetic compass in the establishment of new accessories. The magnetic declination used was 18° East. The distance to the bearing tree is to a 50d spike driven on the right side of the tree at the root crown. I attached a brass washer marked OPLS 991 to the BT blaze.