


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:
None

DESCRIPTION OF CORNER EVIDENCE FOUND:
NONE

See Survey Number 039-2004.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:
At position determined by survey, I set a 5/8" x 30" rebar with 2 1/2" aluminum cap marked as shown below, 28" in the ground, from which:

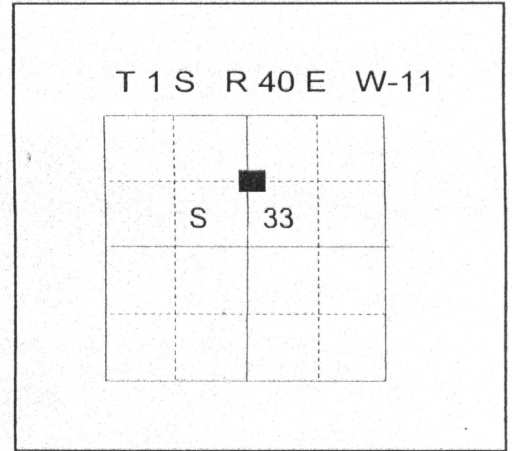

NEW BEARING TREES:

A 12" Douglas fir bears S 57°E a distance of 9.74 feet, marked CN 1/16 S33 BT.

A 12" Douglas fir bears S 63°W a distance of 12.53 feet, marked X BT.

I hereby certify that the corner was monumented on December 7, 2004.
Witnesses: Greg Blackman Jr.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Greg T. Blackman

OREGON
JULY 13, 1973

GREGORY T. BLACKMAN
991

Renewal Date: December 31, 2005

GRIFFITH & BLACKMAN

T1S R40E

BAGETT

N1/16 | S33

2004

OPLS 991

**UNION COUNTY
SURVEYOR**

Date Received 12/30/04

Date Filed 12/30/04

Filed By R. Robinson, Deputy

File Number 111-2004R

I used a steel tape and magnetic compass in the establishment of new accessories. The magnetic declination used was 18° East. The distance to the bearing tree is to a 50d spike driven on the right side of the tree at the root crown. I attached a brass washer marked OPLS 991 to the BT blaze.

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner originally established by Gregory Blackman with Union County Survey 039-2004. Monumentation record 111-2004R states:

At position determined by survey, I set a 5/8" x 30" rebar with 2 1/2" aluminum cap marked as shown, 28" in the ground, from which:

- A 12" Douglas fir bears South 57° East a distance of 9.74 feet, marked CN 1/16 S33 BT
- A 12" Douglas Fir bears South 63° West a distance of 12.53 feet, marked X BT

T 1 S R 40 E W-11

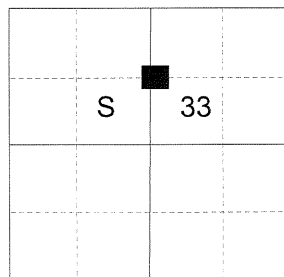

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a 5/8" iron pin, 2" above ground, with 2 1/2" aluminum cap marked as shown, from which:

- A 12" x 6' downed Douglas Fir stump bears South 57° East a dist. of 9.70 ft., dead and down with healed blaze.
- A 12" Douglas Fir stump bears South 63° West a dist. of 12.50 ft., 6" tall with scribes visible on semi-attached slab.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

From the iron pin monument:

NEW BEARING OBJECTS:

- A 5" Tamarack bears South 6° East a dist. of 5.75 ft., marked CN 1/16 S33 BT.
- A 5" Tamarack bears South 62° West a dist. of 17.25 ft., marked CN 1/16 S33 BT.

I hereby certify that the corner was perpetuated on June 25, 2019.
Witness: Kyle A. Tucker

REGISTERED PROFESSIONAL LAND SURVEYOR



OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2021

BAGGETT - GRIFFITH & BLACKMAN
T1S R40E
N 1/16
C
S33
C
2004
OPLS 83571

UNION COUNTY SURVEYOR

Date Received 7/16/19
Date Filed 7/16/19
Filed By [Signature]
File Number 039-2019R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 13° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.