


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. X-13

History of original corner establishment:

Corner was originally established by Henry Meldrum under contract No. 450, during August, 1882. Surveyors General's notes state: "Set a post, 3 ft. long, 3 ins. sq., 24 ins. in the ground for 1/4 sec. cor. mkd. 1/4S on W. face, from which: A tamarack, 26 ins. diam., bears West, 5 lks. dist. mkd. 1/4S BT. A tamarack, 20 ins. diam., bears S18°E., 36 lks. dist. mkd. 1/4S BT."

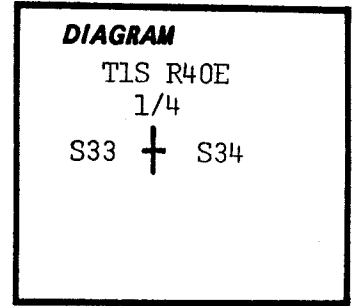

Description of corner evidence found:

Found no trace of record post. Found 20" dead tamarac, scribed 1/4S, measured east 3.5 ft. and found down and rotten 20" tamarac bearing S18°E, 23.1 ft.

Description of monument and accessories established to perpetuate the original location of this corner:

TLS R40E
1/4
S33 + S34
OR PLS 1051
1980

At the above point set 2 1/2" X 30" galvanized pipe and brass cap marked: Set pipe 26" in the ground. No rock in the area.

From which by magnetic declination of N20°E: A 10" spruce bears N82°E, 18.8 ft. scribed 1/4S34BT. A 14" white fir bears N51°W, 16.1 ft. scribed 1/4S33 BT. Painted blazes red and 6" red band around. Placed 54-3s, 54-4s and brass washers stamped PLS 1051 on BTs. Placed 54-4 on steel fence post 5' north of the corner.

I hereby certify that the above corner monument was reestablished as herein described,

Witnesses: Ray McVey
Daniel Rowland
Doug Moser
Ron Gilroy

November 19, 1980

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Barry B. Barbour

OREGON
OCT. 17, 1975
BARRY B. BARBOUR
1051

Office of.....County Surveyor..... County of.....Union.....
State of.....Oregon....., I hereby certify that the within instrument was filed in this office
for record on the.....30th day of.....January....., 1981.

..... by
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY
SURVEYOR**
Date Received 798-278
Date Filed _____
By _____
File No. 189-84 R

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200434

1/4 SECTION CORNER COMMON TO SECTIONS: 33 and 34

TWP. 1 S. RGE. 40 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: December 2004

LAT: 45 ° 26 ' 5.92238 " N

SURVEYOR: GREGORY T. BLACKMAN
OPLS 991

LONG: 117 ° 48 ' 32.12076 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 656183.585 INT FT.

E: 8892757.566 INT FT.

TYPE: GPS

THETA: 1 ° 54 ' 30.5084918 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999053598

ELEV: 4241.30 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner is 2 1/2" Brass Cap monument

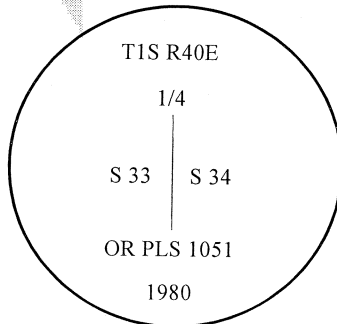

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman
OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: December 31, 2005

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)