


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. A-01

History of original corner establishment:

Original corner established in 1882 by H. Meldrum under contract #450. He set a post, 4 1/2'x4"x4", 24" in ground. From which: A 6" Tamarack bears N48°E, 24 lks. A 3 1/2" Fir bears S26°W, 8 lks. A 3 1/2" Tamarack bears S61°E, 12 lks.

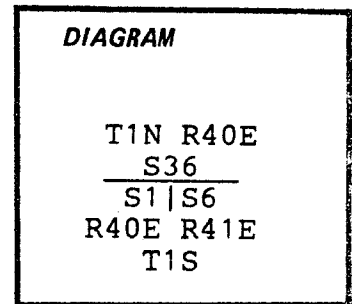

Note: A. Gesner resurveyed this line in 1898 under contract #683. He stated that he found the corner badly decayed and the NE BT was a fir instead of a Tamarack. The other trees had fallen down so he set a post 4'X4"X4" and marked: A 5" Fir bearing S46°E 22 lks. A 12" Tamarack bearing S34°45'W, 56 lks.

Description of corner evidence found:

Found a 3 1/2" BLM brass capped iron pipe stamped: I stamped AM on the BLM brass cap.

T1N R40E
AM

Bearing trees found:

An 11" Fir bears S5 1/2°W, 40.1 ft. scribing visible, T1SR40ES1CCBT. A 21" W. Larch, dead standing, bears S37°W, 37.1 ft. scribing visible: CCBLT1SR40ES1 A 16" Fir bears S47°E, 71.9 ft., blaze healed.

S36
S1|S6
R40E R41E
CC T1S
1973

Note: The three bearing trees found reference the original CC location monumented by the BLM in 1973.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the intersection point on the Base Line (N00°34'28"E, 8.69 ft. from the BLM brass cap), I Set:

A 2 1/2"X30" aluminum capped aluminum pipe stamped: Cap rises 6" above ground. Set steel fence post 3 ft. north of corner.

T1N R40E
S36
S1|S6

I referenced the following existing bearing trees:

An 11" Fir bears S5°W, 48.8 ft., scribing visible T1SR40ES1CCBT A 16" Fir bears S42 1/2°E, 78.0 ft., blaze healed.


R40E R41E
CC
T1S
RLS1848
1986

Painted blazes and attached signs as required in Specifications for Cadastral Surveys, USFS Region 6, March, 1982. A 3/4" brass disk stamped "LS1848 nailed to lower end of blazes.

Where Rd 6200 leaves creek bottom & starts to climb, a pvt rd Y's rt & follows Clark creek 1/2 mile and crosses south 200 ft. a gate on left, follow rd SE 300 ft, cor 20'Rt

Compass Declination: 19 1/2°E
Witness: Jeremy Sutton

I hereby certify that the above described corner monument and/or accessories was perpetuated as hereon described on Aug. 30, 1986.

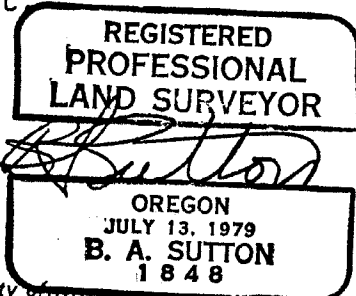

UNION COUNTY SURVEYOR
Date Received 11-21-86
Date Filed 11-26-86
By G. LANGLIZ, DEPUTY
File No. 270-86 R

Office of..... County of.....
State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by.....
(COUNTY OFFICIAL) (DEPUTY)

T. 1 S., R. 41 E., Willamette Meridian, Oregon

CHAINS

The following field notes describe the remonumentation of certain original corner points, township 1 south, range 41 east, of the Willamette Meridian, Oregon, as provided for in the General Special Instructions, Group 350, Oregon, dated May 3, 1957; "Investigation of Collateral or Physical Evidence of Corner Positions and Accessories, Followed by Remonumentation of Corner Points with New Accessories when Needed."

The remonumentation of the original corner points was made at the request of the United States Forest Service, Walling Whitman National Forest, in conjunction with their Land Line Location Program.

The mean magnetic declination is 20° E.

North Boundary, T. 1 S., R. 41 E.,  
(Willamette Base Line)  
Willamette Meridian, Oregon

(Remonumenting a corner established by Henry Meldrum, Deputy Surveyor, in 1862, and rehabilitated by Alonzo Gesner, Deputy Surveyor, in 1898)

The closing cor. of Tps. 1 S., Rs. 40 and 41 E., determined at record bearing and distance from the remains of the original bearing trees:

A fir, 10 ins. diam., bears N. 48° E.,  
24 lks. dist., with healed upper blaze  
and no marks visible on opened lower blaze.

and remains of the bearing trees mkd. by Alonzo Gesner, in 1898

A tamarack, 20 ins. diam., bears S. 34 $\frac{3}{4}$ ° W.,  
56 lks. dist., with scribe marks T1S R40E  
S1 visible on open blaze.

At the corner point

Set an iron post, 28 ins. long, 2 $\frac{1}{2}$  ins. diam., 20 ins. in the ground, with brass cap mkd.

T	1	N	R	40	E
		S	36		
		S	1	S	6
R	40	E	R	41	E
		T	1	S	
		C	C		
				1973	

from which new bearing trees

A fir, 15 ins. diam., bears S. 47° E.,  
110 lks. dist., mkd. T1S R41E S6 CC BT.

A fir, 10 ins. diam., bears S. 5 $\frac{1}{2}$ ° W.,  
61 lks. dist., mkd. T1S R40E S1 CC BT.

(Remonumenting a corner established by  
Nathaniel W. Davenport, Deputy Surveyor, in 1862,  
rehabilitated by Henry Meldrum,  
Deputy Surveyor, in 1882)

The cor. of Tps. 1 N., Rs. 40 and 41 E., determined at

UNION CO. CO.  
SURVEYOR

Date Received 3/15/13

Date Filed 3/15/13

By [Signature]

File No. 325/2013R

T1S41A01