


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. B-05

History of original corner establishment:

None.

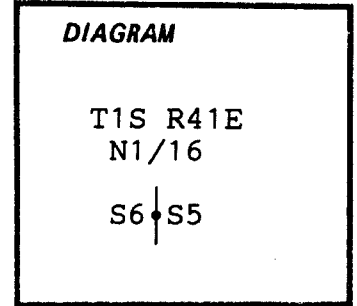

Description of corner evidence found:

None.

Description of monument and accessories established to perpetuate the original location of this corner:

Cap is marked:

T1S R41E  
N1/16  
S6 | S5  
RLS1848  
1986

Corner set by proportioning.  
I set a 2½"x30" aluminum capped aluminum pipe rising 18" in a mound of stones.  
Set steel fencepost 4 ft. West.

New BT's:

A 9" Fir bears S32¾°E, 58.4 ft., blazed&scribed: N1/16S5BT  
An 11" P. Pine bears S52°W, 43.7 ft., blazed&scribed: N1/16S6BT

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982. A ¾" brass disk stamped "RLS 1848" was nailed to the lower end of the blazes.

6200530 intersects road in saddle ¼ mile north of 6200, corner is N30°W, 350 ft. on west slope of ridge top.

Compass Declination: 19½°E

Witness: Jeremy Sutton

I hereby certify that the above described corner monument and/or accessories were established as hereon described on Oct. 16, 1986.

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*B. A. Sutton*  
**OREGON  
JULY 13, 1979  
B. A. SUTTON  
1848**

**UNION COUNTY  
SURVEYOR**

---

Date Received 12-5-86

Date Filed 12-5-86

By G. LANGRIZ, Deputy

File No. 305-86 R

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by .....

(COUNTY OFFICIAL)

(DEPUTY)