

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Corner was established in 1898 by Alonzo Gesner, Deputy Surveyor under Contract No. 683.

Surveyor General's records state:

Set a basalt stone, 10 x 8 x 7 ins., 6" in the ground for closing corner for secs. 6 & 7, mkd. CC on the E., with 5 notches on S. and 1 notch on N. side; from which

A 30" fir bears N 14 E, 20 lks. mkd. CC T 1 S R 41 E S 6 BT.

A 10" fir bears S 20 30 E, 44 lks. mkd. CC T 1 S R 41 E S 7 BT.

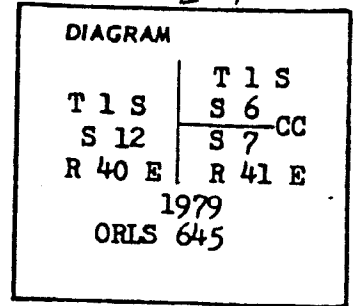

Description of corner evidence found:

At assumed corner location I found a 12" x 10" x 7" basalt stone 6" above ground in good condition with 5 notches on S and 1 notch on N and CC on E face.

Found 36" D. fir stump with BT scribed in face and additional face and scribing on log lying west of stump. Stump bears N 14 E, 20 lks.

Found 22" D. fir stump with BT scribed in face; remainder of tree is gone. Stump bears S 20 30 E, 44 lks.

Description of monument and accessories I established to perpetuate the original location of this corner

I set a 2" galv. iron pipe with brass cap stamped as shown above. Set 6" above surface of ground in a mound of stone with the original stone placed along east edge of pipe below surface.

Set two new bearing trees:

A 9" lodge pole pine bears N 53 E, 25.75 ft. scribed T 1 S R 41 E S 6 CC BT.

A 8" white fir bears S 40 E, 27.30 ft. scribed T 1 S R 41 E S 7 CC BT.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

James H. Hambleton

OREGON
JULY 10, 1954
JAMES H. HAMBLETON
645

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the day of

..... by
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY
SURVEYOR**

Date Received _____

Date Filed _____

By _____

File No. 194-84 R


GPO 796-333

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. E-01

History of original corner establishment:

Original corner established in 1898 by Alonzo Gesner under contract #683. At the corner, he set a stone 10"X8"X7", 6" in the ground, from which:

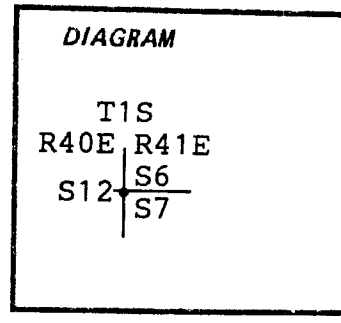

- A 30" Fir bears N14°E, 20 lks.
A 10" Fir bears S20½°E, 44 lks

Description of corner evidence found:

Found a 2½" brass capped iron pipe by LS645 at the original closing corner location from which:

- A 36" Fir stump bears N14°E, 20 lks., with blaze visible, decayed badly, BT visible.
An 11" LP Pine bears N53°E, 25.7 lks., with open blaze visible, scribed: "CCT1SR41ES6BT".
An 8" W. Fir (dead standing) bears S40°E, 27.3 ft. open blaze scribing visible: CCT1SR41ES7BT.
A 22" W. Fir stump bears S20½°E, 44 lks open blaze BT visible.

Note: I stamped AM on brass cap by LS 645.

Description of monument and accessories established to perpetuate the original location of this corner:

Cap is stamped:

At the point of intersection of the South line of Section 6 with the senior east line of Section 12 I set a 2½X30" aluminum capped aluminum pipe rising 12" in a mound of stones. The intersection point bears S89°24'50"W, 11.33 ft. from the original closing corner.

T1S T1S
S12 | S6 CC
| S7
R40E R41E
RLS1848
1986

New BT's:

- A 6½" Doug Fir bears N86½°E, 10.8 ft., blazed&scribed CCT1SR41ES6BT
A 5½" White Fir bears S12°E, 26.9 ft. blazed&scribed, CCT1SR41ES7BT

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS

Region 6, March 1982. A ¾" brass disk stamped "RLS 1848" was nailed to the lower ends of the blazes.

Go to the end of 6200600, 50 ft. west follow posted line 400 ft. south to corner 30 ft. east of new fence

Compass Declination: 19½°E
Witness: Jeremy Sutton
I hereby certify that the above described corner monument and/or accessories were established as hereon described on Nov. 3, 1986.



UNION COUNTY SURVEYOR
Date Received 12-1-86
Date Filed 12-2-86
By G. LANGRITZ DEPUTY
File No. 283-86 R

Office of..... County of.....
State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)