


LINE TREE  
N-3 TO N-4

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Line Tree 6.2 chains West of N-04

History of original corner establishment:

Original line tree established in 1898 by Alonzo Gesner under contract #683. At 26.2 chains, a 30" Tamarack, a line tree marked with 2 notches on the E. & W. sides.

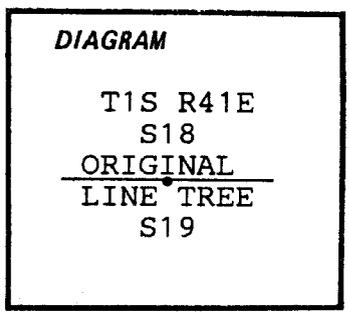

Description of corner evidence found:

I found a 40" Western Larch, dead & down, 7 ft. long section of log with two notches on top and bottom 6 feet above base with badly decayed root crown at west end.

Description of monument and accessories I established to perpetuate the original location of this corner:

I set a 2½"X30" aluminum capped aluminum pipe in the center of the decayed root crown. I painted a red band and nailed a 54-9 sign on the dead and down section of log. Cap is stamped:

T1S R41E  
S18  
LINE TREE  
MONUMENT  
S19  
RLS1848  
1986


New BT's:

A 6½" Doug Fir bears N65°E, 49.2 ft., blazed&scribed: APT1SR41ES18BT  
An 8½" Doug Fir bears S7°W, 6.6 ft., blazed&scribed: APT1SR41ES19BT

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982. A ¾" brass disk stamped "RLS 1848" was nailed to the lower end of the blazes.

To find corner, from 6200466 follow 6200470 NE'ly ¼ mile, line tree is Northwest of road 180 feet on gentle westerly slope.

Compass declination: 19½°E  
Witness: Jeremy Sutton  
I hereby certify that the above described corner monument and/or accessories were established as hereon described on Nov. 1, 1986.

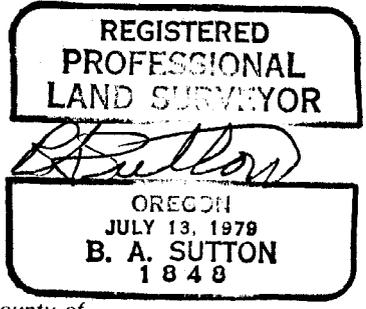

**UNION COUNTY SURVEYOR**  
Date Received 12-18-86  
Date Filed 12-24-86  
By G. LANGLITZ DEPUTY  
File No. 326-86 R

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....  
..... by .....