


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. R-05

History of original corner establishment:

Original corner established in 1898 by Alonzo Gesner under contract #683
He set a stone 15"x14"x7", 12" in ground
From which:

- A 24" W. Fir bears N14½°E, 92 lks.
- A 24" W. Fir bears S52½°E, 22 lks.
- A 14" W. Fir bears S52½°W, 11 lks.
- A 6" Black Pine bears N5°W, 59 lks.

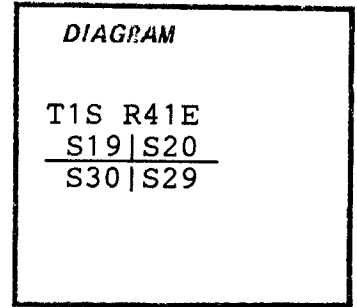

Description of corner evidence found:

Found Stone, 7"x10", rising 12" with 5 notches on East and 2 notches on South.

Bearing trees found:

- A 38½" W. Fir bears N14½°E, 92 lks., blaze healed.
- A 28½" W. Fir bears S52½°E, 22 lks., blaze healed.
- A 31½" W. Fir bears S52½°W, 11 lks., blaze healed.
- An 11" L. Pine bears N5°W, 59 lks., blaze&scribing visible.

Description of monument and accessories | established to perpetuate the original location of this corner:

Note: This corner falls in the wilderness area, and was left undisturbed.

To find corner, follow USFS rd. 6200460 0.3 miles SE'ly from its intersection with rd. 6200, then walk northeasterly 300 ft. to corner. Corner is just off the east end of a rocky ridge.

Compass Declination: 19½°E

Witness: Jeremy Sutton

I hereby certify that the above described corner monument and/or accessories were found and evaluated as hereon described on Aug 22, 1986.



UNION COUNTY SURVEYOR	
Date Received <u>11-21-86</u>	
Date Filed <u>11-26-86</u>	
By <u>G. LANGUITZ DEPUTY</u>	
File No. <u>279-86 R</u>	

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by

(COUNTY OFFICIAL)

(DEPUTY)