


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

J-13  
(400500)

History of original corner establishment:

1883, Frank W. Campbell. U.S. Deputy surveyor, while surveying the township under General Land Office Contract No. 468 established the corner as follows:

Set a post 4 1/2 ft long 4 ins square with marked stone 24 ins in ground for cor to secs 9, 10, 15 & 16 marked T2N S10 on NE R38E S15 on SE S16 on SW and S9 on NW faces with 4 notches on S. and 3 notches on E edges from which  
A tamarack 24 ins dia bears N43°E, 79 lks. dist., marked T2N R38E S10 BT  
A fir 12 ins dia bears S48°E., 23 lks. dist., marked T2N R38E S15 BT  
A tamarack 24 ins dia bears S28°W, 78 lks dist marked T2N R38E S16 BT  
A tamarack 27 ins dia bears N28°W, 17 lks dist marked T2N R38E S9 BT

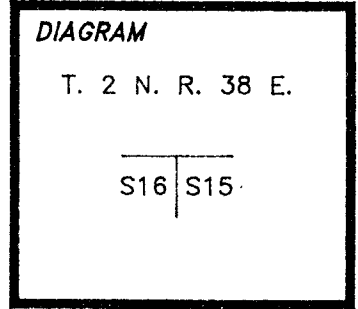

Description of corner evidence found:


24 inch diameter decayed and burnt stump bears N. 44 1/2° E., 52.1 feet, no marks visible (record N. 43° E., 79 links).  
25 inch diameter Fir bears S. 44 1/2° E., 15.2 feet, with healed blaze (record S. 48 E., 23 links).  
Root hole of down 28 inch diameter Western Larch snag bears N. 28° W., 11.2 feet, with scribing "T2N R38E S9" visible on blaze (record N. 28° W., 17 links).

Description of monument and accessories I established to perpetuate the original location of this corner:

At the intersection of record distances from the NE and SE BT's I set a 2 1/2 inch diameter by 30 inch long aluminum pipe, with a 3 1/4 inch diameter aluminum cap, 24 inches in the ground, marked as shown, from which:

New BT's:  
19 inch diameter Fir bears N. 75 1/2° E., 15.9 feet, scribed "T2N R38E PB42" "BT" on double blaze.  
12 inch diameter Fir bears S. 16 1/2° W., 29.5 feet, scribed "T2N R38E S16" "BT" on double blaze.  
21 inch diameter Fir bears N. 65° W., 29.9 feet, scribed "T2N R38E PB41" "BT" on double blaze.

The new bearing trees have a 3/4 inch diameter brass washer stamped "RLS 2308" nailed to the lower blaze near the "BT" scribing.

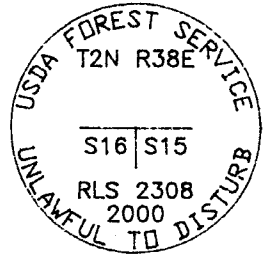

Work Performed By: David A. Schlaich (RLS 2308)  
Witnessed By: Levi D. Hamby  
Equipment: Warren-Knight Surveyors Compass and 75 foot steel tape  
Magnetic Declination 19° east  
Date: July 3, 2000

REGISTERED PROFESSIONAL LAND SURVEYOR  
*David A. Schlaich*  
OREGON  
JULY 16, 1987  
DAVID A. SCHLAICH  
2308

RENEWAL DATE: 06/30/2002

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by.....  
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

8/4/2000  
8/10/00  
R. ROBINSON, DEPUTY  
008-2000R