


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Frank W. Campbell under GLO contract number 468 dated April 12, 1883. Surveyor General record states:

Set a post 4½ ft long 4 ins square with marked stone 24 ins in ground for cor to secs 10, 11, 14 & 15 marked T2N S11 on NE, R38E S14 on SE, S15 on SW and S10 on NW faces with 4 notches on S. and 2 notches on E edges, from which:

- A fir 27 ins dia bears N76°E 40 lks dist marked T2N R38E S11 BT
- A tamarack 24 ins dia bears S61°E 18 lks dist marked T2N R38E S14 BT
- A fir 8 ins dia bears S29°W 27 lks dist marked T2N R38E S15 BT
- A tamarack 30 ins dia bears N76°W 40 lks dist marked T2N R38E S10 BT

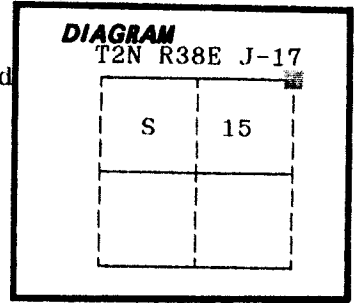

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found no evidence of the original GLO corner monument.

- Found a 20 inch diameter White Fir snag N42°E, 28.3 feet, with scribes visible.
- Found a 20 inch diameter Western Larch S80°E, 11.9 feet, dead and down with scribes visible.
- Found a 15 inch diameter White Fir S35°W, 17.8 feet, live and vigorous with blaze evident.
- Found a 30 inch diameter Western Larch N72°W, 30 feet, dead and down with scribes visible.

See map of survey dated August, 1989.

The GLO call from each tree will cover an area 5 to 6 feet in diameter. I excavated this entire area for evidence of the GLO post and stone, but found no evidence of either. I set the corner at record distance from the Southeast and Southwest bearing trees, as this appears to be the most harmonious of the record GLO calls made.

UNION COUNTY SURVEYOR

Date Received 8-21-89

Date Filed 8-23-89

By G. LANGLITZ, Deputy

File No. 159-89R

Description of monument and accessories I established to perpetuate the

original location of this corner: At the above described position, I set a 2½"x30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which:

New Bearing Trees;


- A 32 inch diameter Spruce bears N36°E, 36.41 feet, marked T2N R38E S11 BT
- A 25 inch diameter Spruce bears S16°E, 12.17 feet, marked T2N R38E S14 BT
- A 15 inch diameter White Fir bears N47°W, 25.91 feet, marked T2N R38E S10 BT

Painted a 6 inch red band around all BTs and attached bearing tree and land survey monument signs.

Set a steel fence post approximately 5 feet North with a Land Survey Monument sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on July 24, 1989.

Witness: Jeff Petersen

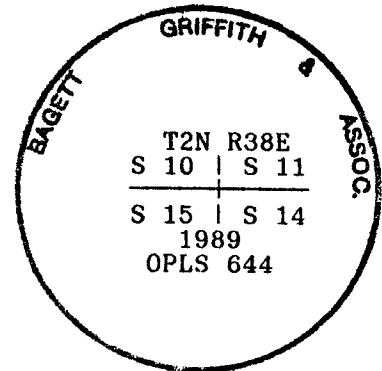

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON
JULY 10, 1864
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)