


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

N-17

History of original corner establishment:

Corner established by Frank W. Campbell under Contract No. 468 dated April 12, 1883, page 24, of the Government Field Notes.  
 North between Sections 22 and 23, variation  $20\frac{1}{4}$  East.  
 Set post  $4\frac{1}{2}$ ' long, 4" square, with marked stone 24" in ground for corners to Sections 14, 15, 22, and 23 marked T 2N R 38E S 14 on NE, S 23 on SE, S 22, on SW and S 15 on NW face with 3 notches on South edge and 2 notches on East edge from which:



- A fir 30" in diam. bears N  $41^{\circ}$  E 21 lks. marked T 2N R 38E S 14 BT.
- A fir 10" in diam. bears S  $76^{\circ}$  E 9 lks. marked T 2N R 38E S 23 BT.
- A tamarack 20" in diam. bears S  $65^{\circ}$  W 14 lks. marked T 2N R 38E S 22 BT.
- A spruce 8" in diam. bears N  $68^{\circ}$  W 57 lks. marked T 2N R 38 E S 15 BT.

This corner set September 6, 1883.  
 No record of subsequent remonumentation found in County Records.

Description of corner evidence found:

I found a fir 36" in diam. bears N  $41^{\circ}$  E 13.86' dead standing with scribing visible.  
 I found a fir stump 27" in diam. 2' high with scribe marks visible on sliver 5" out from the center of the stump.

Description of monument and accessories I established to perpetuate the original location of this corner


I set a  $2\frac{1}{2}$ " x 30" iron pipe 24" in the ground with a brass cap marked as shown.

From which I scribed new BTs:

- A fir 32" in diam. bears N  $02^{\circ}$  W 45.0' scribed T 2N R 38E S 15 BT.
- A fir 16" in diam. bears N  $48^{\circ}$  W 45.0' scribed T 2 N R 38E S 15 BT.
- A fir 21" in diam. bears S  $74^{\circ}$  E 42.2' scribed T 2N R 38E S 23 BT.
- A fir 8" in diam. bears S  $03^{\circ}$  W 26.3' scribed T 2N R 38E S 22 BT.

I nailed BT posters and attention signs to BTs.  
 I nailed brass washers marked PLS 1097 to BT blaze of BTs.  
 I set a steel post 1' South with an attention sign.  
 I painted a red band and scribed blazes of BTs.  
 I used a staff compass with  $21^{\circ}$  declination and a steel chain, measuring distances horizontally.  
 I placed a poster on a jeep trail N  $30^{\circ}$  E 175' to corner from jeep trail on middle ridge.

This corner was set September 9, 1979. Witness by Patrick L. Murphy

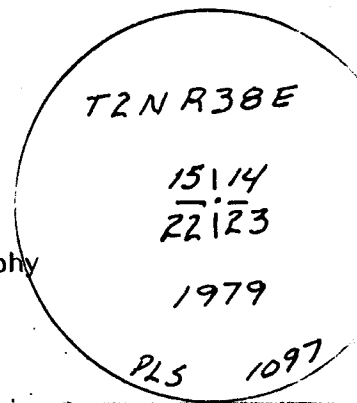

Office of \_\_\_\_\_ County Surveyor \_\_\_\_\_  
 State of \_\_\_\_\_ Oregon \_\_\_\_\_, I hereby certify  
 for record on the \_\_\_\_\_ day of \_\_\_\_\_  
 (COUNTY OFFICIAL)

<b>UNION COUNTY SURVEYOR</b>	
County of _____ Union _____	Date Received _____
by _____ Date Filed _____ (DEPUTY)	
By _____	
File No. <u>217-83R</u>	

REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR

*James H. Buisman*  
 OREGON  
 JULY 22, 1977  
 JAMES H. BUISMAN  
 1087