


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

S-12

History of original corner establishment:

Corner not previously established.



Description of corner evidence found:

N/A

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

James H. Buisman

OREGON
JULY 22, 1977
JAMES H. BUISMAN
1097

Description of monument and accessories I established to perpetuate the original location of this corner

At the position described above, I set a 2½" aluminum cap on a 2½" x 30" aluminum pipe 22" in the ground marked as shown. I raised a stone mound around the cap.

From which I scribed BTs:

- A fir 11" in diam. bears S 12°06' E 31.5' scribed NE 1/16 S 28 BT.
- A fir 13" in diam. bears S 86°48' E 23.6' scribed NE 1/16 S 28 BT.

I nailed a brass washer marked OPLS 1097 to BT blazes.

I set a steel fence post, 5' South with signs 54-2 and 54-4.

I set a fiberglass fence post 5' West with sign 54-2.

I painted a red band around BTs and face of scribe.


I used a steel tape and Wild T-2 and measured a horizontal distance to the center of the BTs.

This corner was set October 28, 1980. Witness by Patrick L. Murphy.

See map of survey.

Office of County of
 State of , I hereby certify that the within instrument was filed in this office
 for record on the day of

..... by
 (COUNTY OFFICIAL) (DEPUTY)

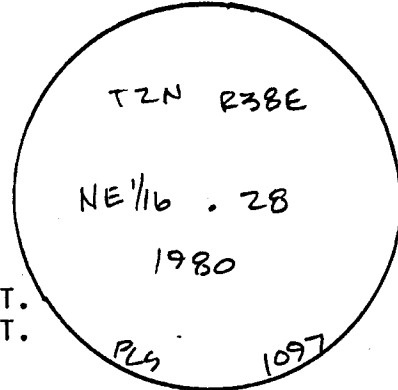

**UNION COUNTY
SURVEYOR**

Date Received _____

Date Filed _____

By _____

File No. 228-83R

GPO 796-333