

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

T-9


History of original corner establishment:

Corner established in 1883 by Frank W. Campbell under Contract No. 468.

40.00 chains. Set a basalt stone 13" x 10" x 9" 9 inches in the ground marked $\frac{1}{4}$ on West face.

From which:

A fir 7" in diam. bears N 79° W 36 lks. marked $\frac{1}{4}$ S BT.
A fir 11" in diam. bears S 68° E 40 lks. marked $\frac{1}{4}$ S BT.



Description of corner evidence found:

None found.

REGISTERED PROFESSIONAL LAND SURVEYOR

James H. Buisman

OREGON
JULY 22, 1977
JAMES H. BUISMAN
1097

Description of monument and accessories I established to perpetuate the original location of this corner

At the position described above, I set a 2 1/2" x 30" aluminum pipe 15" in the ground with an aluminum cap marked as shown: Raised stone mound around cap.

From which I scribed BTs:

A fir 14" in diam. bears S 39° 39' E 43.0' marked $\frac{1}{4}$ S 28 BT.
A fir 14" in diam. bears S 31° 29' W 48.7' marked $\frac{1}{4}$ S 29 BT.

I nailed a brass washer marked OPLS 1097 to BT blazes.


I set a steel fence post S 15° E 1.33' with signs 54-4 and 54-9.

I painted a red band around BTs and face of scribe.

I used a steel tape and Wild T-2 and measured a horizontal distance to the center of the BTs.

This corner was set October 8, 1980. Witness by Patrick L. Murphy.

See map of survey.

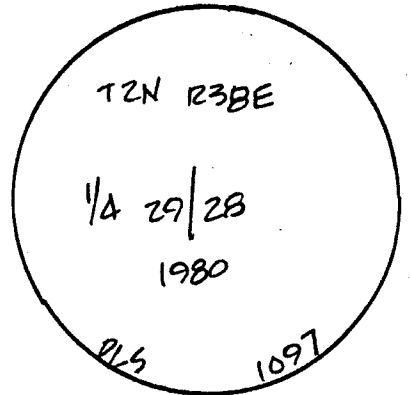

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the day of

(COUNTY OFFICIAL)

(DEPUTY)

UNION COUNTY SURVEYOR
Date Received _____
Date Filed _____
By _____
File No. 229-83R
GPO 796-333