


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established.

T-10



Description of corner evidence found:

N/A

REGISTERED
PROFESSIONAL
LAND SURVEYOR

James H. Buisman

OREGON
JULY 22, 1977
JAMES H. BUISMAN
1097

Description of monument and accessories I established to perpetuate the original location of this corner

At the position described above, I set a 2½" aluminum cap on a 2½" x 30" aluminum pipe 24" in the ground marked as shown.

From which I scribed BTs:

A fir 10" in diam. bears S 73°06' E 20.95' scribed CW 1/16 S 28 BT.

A fir 7" in diam. bears N 26°38' W 14.7' scribed CW 1/16 S 28 BT.

I nailed a brass washer marked OPLS 1097 to BT blazes.


I set a steel fence post 5' North and 5' South with signs 54-2 and 4 and 54-2.

I painted a red band around BTs and face of scribe.

I used a steel tape and Wild T-2 and measured a horizontal distance to the center of the BTs.

This corner was set October 26, 1980. Witness by Patrick L. Murphy.

See map of survey.

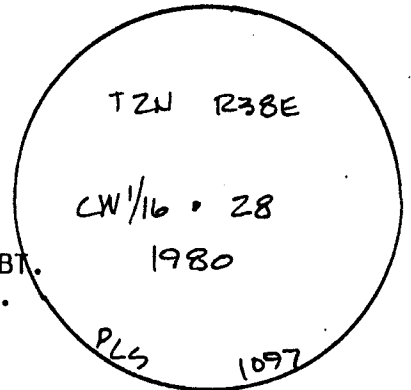

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the day of

(COUNTY OFFICIAL)

(DEPUTY)

UNION COUNTY
SURVEYOR

Date Received _____
 Date Filed _____
 By _____
 File No. 230-83R

GPO 796-333