

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner established in 1883 by Frank W. Campbell under Contract No. 468.

40.00 chains. Set a basalt stone 20" x 10" x 3" 15 inches in the ground marked $\frac{1}{4}$ on West face.

From which:

- A fir 27" in diam. bears S 77° W 148 lks. marked $\frac{1}{4}$ S BT.
- A pine 30" in diam. bears N 38° E 112 lks. marked $\frac{1}{4}$ S BT.

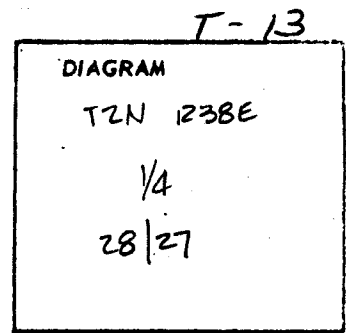

Description of corner evidence found:

None found.




Description of monument and accessories I established to perpetuate the original location of this corner

At the position described above, I set a 2½" x 30" aluminum pipe 10" in the ground with an aluminum cap marked as shown. Raised stone mound around cap.

From which I scribed BTs:

- A pine 30" in diam. bears S $69^{\circ}05'$ E 53.8' marked $\frac{1}{4}$ S 27 BT.
- A pine 12" in diam. bears N $28^{\circ}37'$ W 56.0' marked $\frac{1}{4}$ S 28 BT.

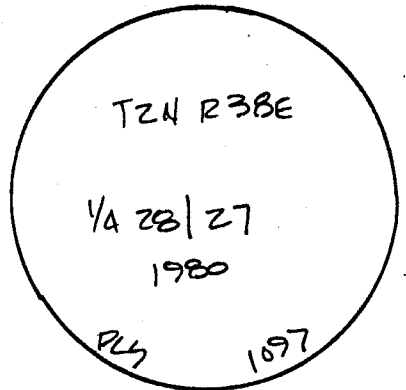

I nailed a brass washer marked OPLS 1097 to BT blazes.

I set a steel fence post South 1.75 feet with signs 54-4 and 54-9.

I painted a red band around BTs and face of scribe.

I used a steel tape and Wild T-2 and measured a horizontal distance to the center of the BTs.

This corner was set October 8, 1980. Witness by Patrick L. Murphy.

See map of survey.

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the day of.....

..... by
 (COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY
SURVEYOR**

Date Received _____

Date Filed _____

By _____ GPO 796-333

File No. 232-83R