


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established.



Description of corner evidence found:

N/A

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*James H. Buisman*

OREGON  
JULY 22, 1977  
**JAMES H. BUISMAN**  
1097

Description of monument and accessories I established to perpetuate the original location of this corner

At the position described above, I set a 2½" aluminum cap on a 2½" x 30" aluminum pipe 27" in the ground marked as shown.

From which I scribed BTs:


- A fir 17" in diam. bears N 30°43'W 13.8' scribed CS 1/16 S 28 BT.
- A fir 12" in diam. bears S 75°37' W 71.5' scribed CS 1/16 S 28 BT.

- I nailed a brass washer marked OPLS 1097 to BT blazes.
- I set a steel fence post 5' South with signs 54-2 and 54-4.
- I set a fiberglass fence post 5' West with signs 54-2.
- I painted a red band around BTs and face of scribe.

I used a steel tape and Wild T-2 and measured a horizontal distance to the center of the BTs.

This corner was set October 30, 1980. Witness by Patrick L. Murphy.

See map of survey.

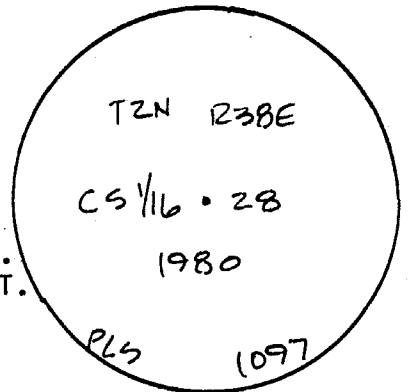

Office of..... County of.....  
 State of....., I hereby certify that the within Instrument was filed in this office  
 for record on the ..... day of .....

..... by .....

(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY  
SURVEYOR**

---

Date Received \_\_\_\_\_

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 234-83R