

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1883 by Frank W. Campbell under Contract No. 468.

80.00 Chains set a basalt stone 10" x 10" x 6" 7 inches in the ground with 1 notch on South side and 4 notches on East edge.


From which:

- A pine 20" in diam. bears S 71° E 232 lks. marked T 2N R 38E S 33 BT.
- A fir 20" in diam. bears S 9° W 175 lks. marked T 2N R 38E S 32 BT.

No other trees scribed. Built stone mound alongside corner.

Description of corner evidence found:

None found.



**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

James H. Buisman

OREGON
JULY 22, 1977
JAMES H. BUISMAN
1097

Description of monument and accessories established to perpetuate the original location of this corner

At the position described above, I set a 2½" x 30" aluminum pipe 20" in the ground with an aluminum cap marked as shown.

Raised stone mound around cap.

From which I scribed BTs:

- A fir 7" in diam. bears N 57°50' E 19.4' marked T 2N R 38E S 28BT.
- A fir 10" in diam. bears S 64°22' 173.8' marked T 2N R 38E S 33 BT.
- A fir 24" in diam. bears S 80°59' W 139.6' marked T 2N R 38E S 32 BT.
- A pine 11" in diam. Bears S 12°34' W 86.1' Marked T 2N R 38E S 32 BT.

I nailed a brass washer marked OPLS 1097 to BT blazes.


I set a steel fence post 2.5' South with signs 54-4 and 54-9.

I painted a red band around BTs and face of scribe.

I used a steel tape and Wild T-2 and measured a horizontal distance to the center of the BTs.

This corner was set October 7, 1980. Witness by Patrick L. Murphy.

See map of survey.

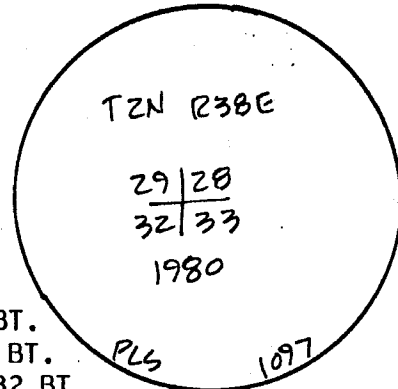

Office of County of

State of, I hereby certify that the within instrument was filed in this office for record on the day of

..... by (COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY
SURVEYOR**

Date Received _____

Date Filed _____

By _____

File No. 238-832