

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

V-19


**History of original corner establishment:**

Corner established by Frank W. Campbell under Contract No. 468 dated April 12, 1883, page 19, of the Government Field Notes.

East between Sections 26 and 35, variation  $19\ 3/4^{\circ}$  East.  
40.00 chains set basalt stone 12" x 12" x 5" 8" in ground marked  $\frac{1}{4}$  on North face.

- A pine 36" in diam. bears N  $10^{\circ}$  E 57 lks. marked  $\frac{1}{4}$  S BT.
- A pine 30" in diam. bears S  $21^{\circ}$  W 159 lks. marked  $\frac{1}{4}$  S BT.

This corner was set September 5, 1883.

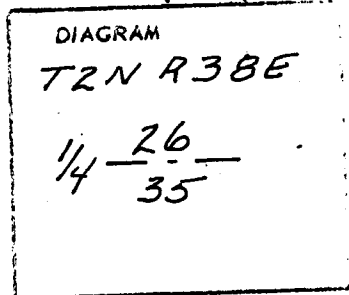

No record of subsequent remonumentation found in County Records.

**Description of corner evidence found:**

I found a pine stump 36" in diam. approximately 1.0' high with part of the BT blaze on the stump. The stump bears N  $10^{\circ}$  E 44.22'. The tree is SE of the stump with faint scribing visible.

I found a pine 30" in diam. the wind blew down bearing S  $21^{\circ}$  W 104.94' with visible scribing.

GLO description of distance was unreadable for the NE BT. 67 lks. distance intersected the readable distance of 159 lks. from the SW BT. Bearings also confirmed this location.

**Description of monument and accessories established to perpetuate the original location of this corner**


I set a  $2\frac{1}{2}$ " x 30" iron pipe 6" in the ground and raised a 3' rock mound with a brass cap marked as shown.

From which I scribed new BTs:

- A pine 18.6" in diam. bears N  $87^{\circ}$  E 132.5' scribed  $\frac{1}{4}$  S BT.
- A fir 32.2" in diam. bears N  $15^{\circ}$  W 275.5' scribed  $\frac{1}{4}$  S BT.

I nailed BT signs and attention signs to BTs.  
I nailed steel washers marked PLS 1097 to BTs.  
I set a steel post 3' North with an attention sign.  
I painted a red band and scribed blazes red of all BTs.  
I used a staff compass with  $20^{\circ}$  declination and a steel chain, measuring the distances horizontally.

I set a poster at the end of Skid Road N  $54^{\circ}$  W 500' from corner on 20" diam. pine and a poster on Jeep Trail N  $54^{\circ}$  W 1,000' from corner on 24" fir on the South side of the road.  
This corner was set October 12, 1979. Witness by Patrick L. Murphy and Timothy W. Torgerson.

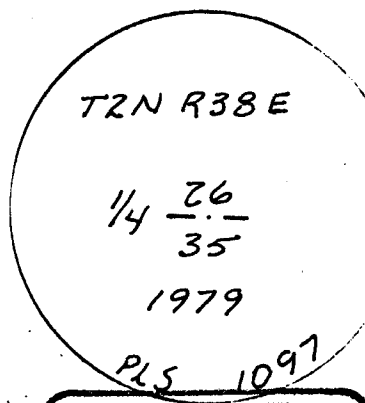

Office of \_\_\_\_\_ County Surveyor \_\_\_\_\_  
State of \_\_\_\_\_ Oregon \_\_\_\_\_, I hereby certify that the within instrument was filed in this office for record on the \_\_\_\_\_ day of \_\_\_\_\_  
(COUNTY OFFICIAL)

**UNION COUNTY SURVEYOR**

County of \_\_\_\_\_ Union \_\_\_\_\_

Date Received \_\_\_\_\_

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 244-83R

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*James H. Buisman*

OREGON  
JULY 22, 1977  
JAMES H. BUISMAN  
1097