

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner established in 1883 by Frank W. Campbell under Contract No. 468.

40.00 chains. Set a post 3 1/2' long, 3" square, 24" in the ground marked 1/4 S on West face.

From which:

- A tamarack 20" in diam. bears N 45° W 24 lks. marked 1/4 S BT.
- A tamarack 20" in diam. bears S 30° E 24 lks. marked 1/4 S BT.



Description of corner evidence found:

None found.

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*James H. Buisman*

OREGON  
JULY 22, 1977  
JAMES H. BUISMAN  
1097

Description of monument and accessories I established to perpetuate the original location of this corner

At the position described above, I set a 2 1/2" x 30" aluminum pipe 26" in the ground with an aluminum cap marked as shown.

From which I scribed BTs:

- A fir 10" in diam. bears N 46° 37' W 77.5' marked 1/4 S 32 BT.
- A fir 14" in diam. bears N 32° 54' E 58.6' marked 1/4 S 33 BT.

I nailed a brass washer marked OPLS 1097 to BT blazes.


I set a steel fence post 5' North with signs 54-4 and 54-9.

I painted a red band around BTs and face of scribe.

I used a steel tape and Wild T-2 and measured a horizontal distance to the center of the BTs.

This corner was set October 7, 1980. Witness by Patrick L. Murphy.

See map of survey.

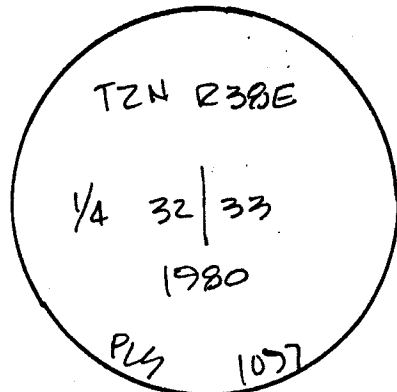

Office of ..... County of .....

State of ....., I hereby certify that the within instrument was filed in this office for record on the ..... day of .....

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY  
SURVEYOR**

---

Date Received \_\_\_\_\_

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 247-83R

GPO 796-333