


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established.



Description of corner evidence found:

N/A

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

James H. Buisman

OREGON
JULY 22, 1977
JAMES H. BUISMAN
1097

Description of monument and accessories I established to perpetuate the original location of this corner

At the position described above, I set a 2½" aluminum cap on a 2½" x 30" aluminum pipe 20" in the ground marked as shown. I built a stone mound around the cap.

From which I scribed BTs:

- A fir 21" in diam. bears N 49°21' W 92.7' scribed CE 1/16 S 33 BT.
- A fir 16" in diam. bears S 01°28' W 114.9' scribed CE 1/16 S 33 BT.

I nailed a brass washer marked OPLS 1097 to BT blazes.

I set a steel fence post .6' North with signs 54-2 and 54-4.

I set a fiberglass fence post 12" South with sign 54-2.

I painted a red band around BTs and face of scribe.

I used a steel tape and Wild T-2 and measured a horizontal distance to the center of the BTs.

This corner was set October 30, 1980. Witness by Patrick L. Murphy.


See map of survey.

Office of County of

State of, I hereby certify that the within instrument was filed in this office for record on the day of

..... by

(COUNTY OFFICIAL) (DEPUTY)

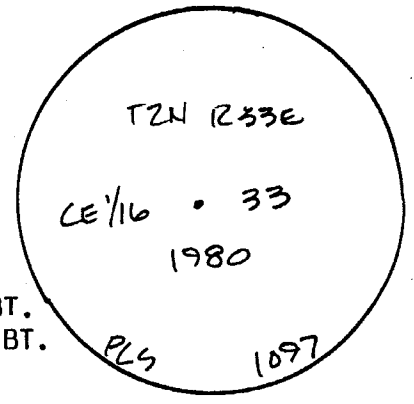

**UNION COUNTY
SURVEYOR**

Date Received _____

Date Filed _____

By _____

File No. 248-83R

GPO 796-333