

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

2-13

History of original corner establishment:

Corner established by Frank W. Campbell under Contract No. 468 dated April 12, 1883, page 32 of the Government Field Notes.

North between Sections 33 and 34, variation 21 1/2 East.

40.00 chains set post 3 1/2' long, 3" square, with marked stone 24" in the ground for 1/4.


A tamarack 27" in diam. bears N 34° E 16 lks. marked 1/4 S BT.  
A fir 20" in diam. bears S 55° W 32 lks. marked 1/4 S BT.

This corner set September 7, 1883.

No record of subsequent remonumentation found in County Records.

Description of corner evidence found:

I found a tamarack 23.8" in diam. down with scribing visible and a fir 34.4" in diam. to be a good BT with blazes closed.

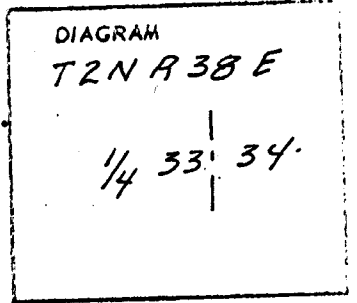

Description of monument and accessories I established to perpetuate the original location of this corner

I set a 2 1/2" x 30" iron pipe 24" in the ground with a brass cap marked as shown.

From which I scribed new BTs:

A fir 19" in diam. bears N 25° E 30.2' scribed S 1/8 BT.  
I used the original fir 34.4" in diam. bears S 55° W 21.12' with closed blazes.

I nailed BT posters and attention signs to BTs.

I nailed brass washers marked PLS 1097 to BT blazes of BTs.

I set a steel post 1' North with an attention sign.

I painted a red band and scribed blazes of all BTs.

I used a staff compass with 21° declination and a steel chain measuring all distances horizontally.

I painted all visible scribing on the old BTs and placed attention signs and BT posters on original BTs.

This corner was set September 28, 1979.

Office of County Surveyor

State of Oregon

for record on the day of

(COUNTY OFFICIAL)

by


Witnessed by Edrick L. Murphy and Dennis L. Paasch. Union

Date Received

Date Filed (DEPUTY)

By

File No. 249-83R

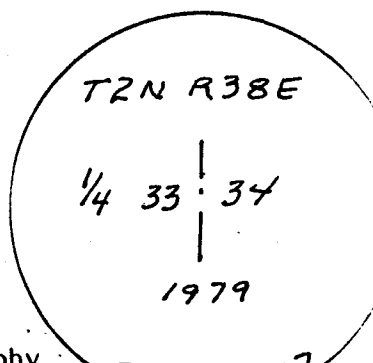

T2N R38E

1/4 33 34

1979

PLS 1097

REGISTERED PROFESSIONAL LAND SURVEYOR

*James H. Buisman*

OREGON JULY 22, 1977 JAMES H. BUISMAN 1097