

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**


**HISTORY OF ORIGINAL CORNER ESTABLISHED:**

Corner originally established by Rufus S. Moore under GLO Contract No. 382, dated March 23, 1881. Survey General States:

Set post for 1/4 Sec. Cor. From which:

- A Fir 10 ins. diam. bears S 40° W, 2 lks. dist.
- A Fri 12 ins. diam. bears N 40° W, 8 lks. dist.

T 3 N R 39 E Z-11

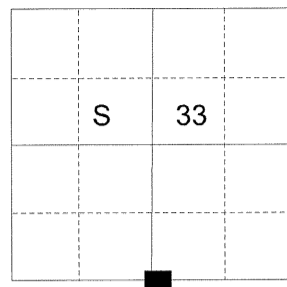

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

None

See Survey Number 034-2014

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At a position determined by survey, I set a 2 1/2" x 30" aluminum pipe with a 2 1/2" aluminum cap marked as shown below, 15" in the ground, with a mound of stone 1 1/2' diameter to the top of the cap.

**NEW BEARING OBJECTS:**


- A 7" Spruce bears N 42° E, a distance of 33.90 feet, marked 1/4 S33 BT.
- A 15" Western Larch bears S 45° E, a distance of 17.40 feet, marked 1/4 S4 BT.
- A 14" Spruce bears S 87° W, a distance of 19.95 feet, marked 1/4 S4 BT.
- A 8" Spruce bears S 36° W, a distance of 22.80 feet, marked X BT.

Set a steel fencepost +/- 3 feet East of corner monument.

I hereby certify that the corner was monumented on November 7, 2014.



Renewal Date: June 30, 2015

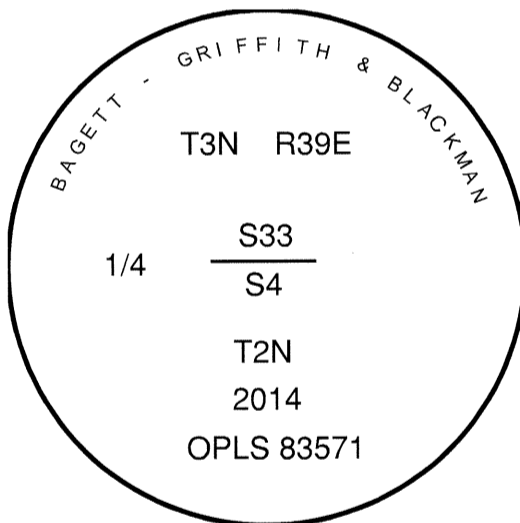

**UNION COUNTY SURVEYOR**

Date Received 11/10/14

Date Filed 11/10/14

Filed By [Signature]

File Number 063-2014R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 16° East declination, the distances are to a 60d spike driven into the right side of the root crown of the new bearing trees. I drive a 60d spike into the left side of the root crown of the Northeast bearing tree. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.