

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner not previously established.


No record of monumentation found in UNION COUNTY survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Corner not previously established.

See Survey Number 015-2005.

T 2 N R 39 E F-08



DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by said survey, I set a 5/8" x 30" iron pin with 1 1/2" aluminum cap marked as shown below, 30" in the ground, from which:

NEW BEARING TREES:

A 9 inch diameter Tamarack bears S 88°E, a distance of 25.40 feet, marked NE1/16 S8 BT.

A 11 inch diameter White Fir bears S 9°W, a distance of 8.10 feet, marked NE1/16 S8 BT.


Set steel fence post approximately 1 ft North of monument.

I hereby certify that the corner was monumented on July 6, 2005.
Witness: Greg Blackman Jr. and Rick Thew

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2006

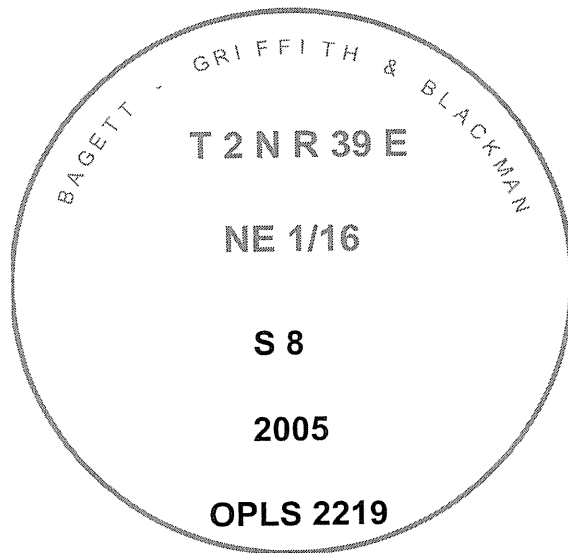

UNION COUNTY SURVEYOR

Date Received 7/28/05

Date Filed 8/9/05

Filed By Greg Blackman Jr.

File Number 015-200512

I used a steel tape and magnetic compass in the establishment of new accessories. The magnetic declination used was 17° East. The distance to the bearing trees is to a 50d spike driven on the right side of the tree at the root crown. I attached a brass washer marked OPLS 2219 to the BT blaze.