


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

J-1

History of original corner establishment:

Set basalt stone 16"x12"x8" in mound of stone.
22" Pine N45E 83 lks.



Description of corner evidence found:
Red painted stone in ground.

Pine N45E 54.8°
Pine N46W 74.2°
Pine S10W 52.0°

All trees growing with scribes visible.

Description of monument and accessories I established to perpetuate the original location of this corner:

	T2N
	R38E R39E
Set 2"x30" iron pipe with brass-cap marked:	S12 S7
	S13 S18
	1978
	RLS 346

12" Fir S64E 26.7 Mkd. T2N R39E S18 BT

Set 6" fence post on line apx. 5' North. All BT's have BT signs and red painted stripe.

There is a red painted and blazed line through this corner running North and South

Office of..... COUNTY SURVEYOR..... County of..... UNION.....
OREGON

State of....., I hereby certify that the within instrument was filed in this office on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

REGISTERED
PROFESSIONAL
LAND SURVEYOR

W O Harris

OREGON
MAY 6, 1960
WAYNE O. HARRIS
346

FILED IN COUNTY
SUBDIVISION

Date Received.....
CPO-798-276
No. 263-83R


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Rufus S. Moore under GLO contract number 382, dated March 23, 1881. Surveyor General record states: Set basalt stone 16x12x8 in mound of stone for cor to Secs 7 + 18, from which;

A pine 22 in diam bears N45°E 83 lks dist
 Corner found by Frank W. Campbell under GLO contract number 468, dated April 12, 1883. Surveyor General record states:
 The cor to secs 7,12,13 & 18 which is a stone 16x12x8 ins marked with 4 notches on S. and 2 notches on N. edges with a mound of stone from which:


A pine 22 ins dia bears N45°E 83 lks dist marked T2N R39E S7 BT
 Corner remonumented by Wayne O. Harris, OPLS 346, in 1978. His record states: Found red painted stone in ground, Pine N45E 54.8', Pine N46W 74.2', Pine S10W 52.0'. All trees growing with scribes visible. Set 2"x30" iron pipe with brass cap marked as shown (below)
 12" Fir S64E 26.7 Mkd. T2N R39E S18 BT
 Set 6' fence post on line apx. 5' North.

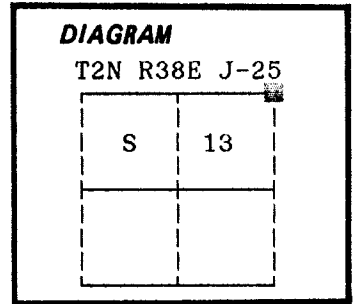

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

- Found a 2½"x30" iron pipe with brass cap marked as shown loose in scattered mound of stone.
- Found a 30 inch diameter Ponderosa Pine stump N45°E, 54.8 feet, cut recently with scribes visible.
- Found a 13 inch diameter Douglas Fir S64°E, 26.7 feet, live and vigorous with scribes visible.
- Found a 30 inch diameter Ponderosa Pine stump S10°W, 52.0 feet, cut recently with scribes visible.
- Found a 30 inch diameter Ponderosa Pine N46°W, 74.2 feet live and vigorous with scribes visible.
- Found a steel fence post approximately 5 feet North with an Attention and Property Boundary sign attached.



See map of survey dated August, 1989.

Bearings and distances to the existing bearing trees are the record bearing and distance of Wayne O. Harris. (See his monumentation sheet filed separately).

Description of monument and accessories | established to perpetuate the

original location of this corner: I reset the Harris monument and rebuilt the mound of stone around the monument, 5 ft. base to top of cap, from which:

New Bearing Trees;

- A 15 inch diameter Ponderosa Pine bears N10°E, 64.75 feet, marked T2N R39E S7 BT
- A 15 inch diameter Ponderosa Pine bears S82°W, 66.60 feet, marked T2N R38E S13 BT

Painted a 6 inch red band around all BTs and attached bearing tree and land survey monument signs.

I hereby certify that the above corner point was perpetuated as hereon described on July 21, 1989.

**REGISTERED
 PROFESSIONAL
 LAND SURVEYOR**

Duane I. Griffith
 OREGON
 JULY 10, 1964
DUANE I. GRIFFITH
 644

**UNION COUNTY
 SURVEYOR**

Date Received 8-21-89

Date Filed 8-23-89

By G. LANGLITZ DEPUTY

File No. 162-89 R

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200509

SECTION CORNER COMMON TO SECTIONS: 7, 18, 12, and 13

TWP. 2 N. RGE. 38 E.
& 39

GEODETIC COORD: NAD 83(91)

DATE TIED: June 3, 2005

LAT: 45 ° 39 ' 35.74567 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 117 ° 59 ' 39.46805 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 736633.441 INT FT.

E: 8842654.185 INT FT.

TYPE: GPS

THETA: 1 ° 46 ' 37.2351233 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999313137

ELEV: 3844.61 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner is 2 1/2" Brass Cap on a 2 1/2" iron pipe
marked as shown:



REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson
OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2006

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)