

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

INDEX FILE# N-7


History of original corner establishment:

Corner originally set by Rufus S. Moore under General land office contract number 382, dated March 23, 1881. Notes state;

Set post for 1/4 corner from which;

A 20 inch dia. tamarack bears N8°W, 29 lks.

A 8 inch tamarack bears S23°W, 31 lks.

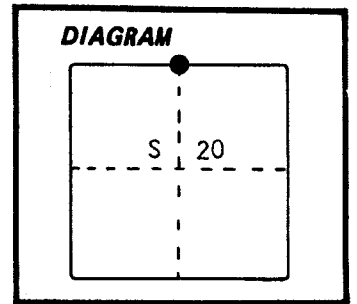

Description of corner evidence found:


No evidence found

Description of monument and accessories established to perpetuate the original location of this corner:

At proportionate distance, I took a 7 inch red fir tree for the corner. I scribed 1/4 S17 on the North face and 1/4 S20 on the South face, from which;

A 18 inch dia. red fir bears S30°W, 11.7 feet, marked 1/4 S20 BT

A 16 inch dia. tamarack bears N48°W, 49.3 feet, marked 1/4 S17 BT

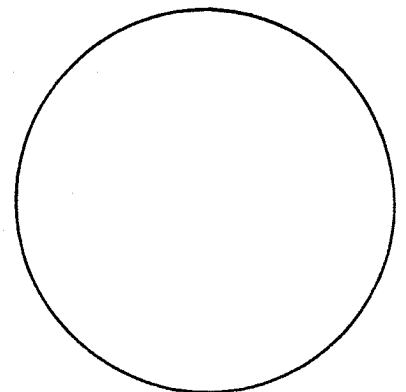

REGISTERED PROFESSIONAL LAND SURVEYOR

Gregory T. Blackman

OREGON JULY 13, 1973 GREGORY T. BLACKMAN 991

I used a steel tape and magnetic compass with 18° East declination in the establishment of these accessories. I set a brass washer marked OPLS 991 by the BT scribe, all distances were measured to the center of the trees.

Office of COUNTY SURVEYOR County of UNION

State of OREGON, I hereby certify that the within instrument was filed in this office

for record on the 10 day of SEPTEMBER, 1981.

HOWARD L. PERRY
(COUNTY OFFICIAL)

by Larry J. Daught
(DEPUTY)

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____ ☆ GPO-798-276

By _____

File No. 271-83R