


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

INDEX FILE No. "N-8"

History of original corner establishment:

Corner not previously established

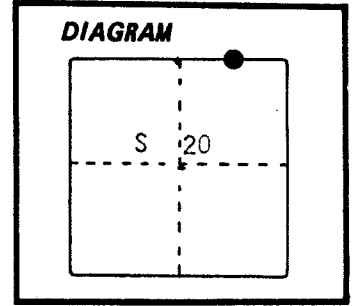

Description of corner evidence found:

None


Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance, I set a 1½ inch x 30 inch iron pipe with brass cap marked as shown, 23 inches in the ground, from which;

A 14 inch dia. pine bears S64°W, 17.0 feet, marked E1/16 S20 BT

A 16 inch dia. pine bears N17°W, 45.2 feet, marked E1/16 S17 BT

Raised mound of stone

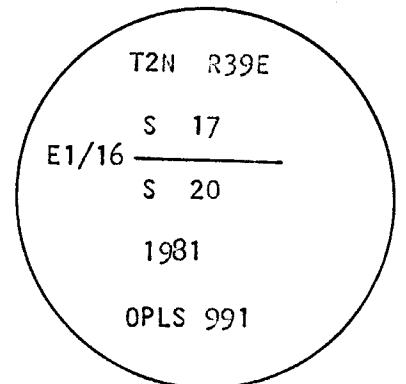

REGISTERED PROFESSIONAL LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1873
GREGORY T. BLACKMAN
991

I used a steel tape and magnetic compass with 18° East declination in the establishment of these accessories. I set a brass washer marked OPLS 991 by the BT scribe, all distances were measured to the center of the trees.

Office of COUNTY SURVEYOR County of Union

State of OREGON, I hereby certify that the within instrument was filed in this office for record on the 10 day of SEPTEMBER, 1981.

Howard L. Peery
(COUNTY OFFICIAL)

by Gay L. Langhitt
(DEPUTY)

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____ ☆ GPO-728-276

By _____

File No. 272-83R