


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

P-13

History of original corner establishment:

There was a post set for the $\frac{1}{4}$ corner bet. 21 & 22 from which the following bearing trees were set:

- A pine 24" dia. bears N 74° E, 26 lks.
- A pine 10" dia. bears N 40° W, 24 lks.



Description of corner evidence found:

No evidence of corner or accessories was found as old road apparently destroyed all evidence.

Description of monument and accessories established to perpetuate the original location of this corner

Established the location of this $\frac{1}{4}$ cor. by proportionate measurements. I set a 5/8" x 30" iron pin with a cap stamped RLS 645 in a mound of stone from which I set the following new bearing trees:

- A pine 12" dia. which bears N 18° W, 62.9 feet scribed $\frac{1}{4}$ S S 21 BT.
- A pine 11" dia. which bears S 26° E, 16.8 feet scribed $\frac{1}{4}$ S S 22 BT.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

James H. Hambleton
12-20-77

GREGON
JULY 10, 1964
JAMES H. HAMBLETON
645

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the day of.....
 by
 (COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR	
Date Received	_____
Date Filed	_____
By _____	
File No.	<u>280-83R</u>

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2017010

1/4 SECTION CORNER COMMON TO SECTIONS 21 AND 22

TWP. 2 N RGE. 39 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: June 14, 2017

LAT: 45 ° 38 ' 18.04398 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 117 ° 55 ' 55.56122 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 729266.741 INT FT.

E: 8858798.779 INT FT.

TYPE: GPS

THETA: 1 ° 49 ' 16.0267136 "

ORDER: SECOND CLASS: 1




SCALE FACTOR: 0.9999281522

ELEV: 3421.88 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

5/8" iron pin with 2 1/2" aluminum cap marked as shown.

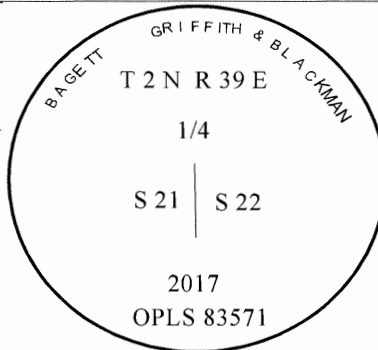

Renewal Date: December 31, 2018

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)


DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner originally established by Rufus S. Moore under GLO contract No. 382 dated March 23, 1881. Surveyor General field notes state:
Set post for 1/4 Sec. Cor.

T 2 N R 39 E P-13



From which:

A pine 24" dia. Bears N74°E 26 lks. Dist.
A pine 10" dia. Bears N40°W 24 lks. Dist

In Survey Number 108-77 James H. Hambleton established the location of this 1/4 cor. by proportionate measurement. Union County Monumentation record states:

Set a 5/8" x 30" iron pin with a cap stamped RLS 645 in a mound of stone from which:
A pine 12" dia. Bears N18°W, 62.9 ft. scribed 1/4S S 21 BT
A pine 11" dia. Bears S26°E, 16.8 ft. scribed 1/4S S 22 BT

DESCRIPTION OF CORNER EVIDENCE FOUND:

5/8" Iron pin 8" above ground in a collar of stone 2 1/2' diam., from which:
A pine 23" dia. Bears N18°W, 62.9 ft. alive and vigorous with healed blaze

SEE SURVEY NUMBER 024-2017

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

I add a 2 1/2" Aluminum cap, marked as shown below, onto the existing iron pin, from which:


NEW BEARING TREES:

A 7" Ponderosa Pine bears North 52° East, a distance of 28.35 feet, marked 1/4 S22 BT.
A 6" Ponderosa Pine bears South 25° East, a distance of 42.30 feet, marked 1/4 S22 BT.
A 12" Ponderosa Pine bears South 49° West, a distance of 25.00 feet, marked 1/4 S21 BT.
A 5" Ponderosa Pine bears North 7° West, a distance of 14.15 feet, marked 1/4 S21 BT.

Corner falls in a North/South fenceline approx. 10 ft. South of a gate post.

I hereby certify that the corner was perpetuated June 14, 2017.

Witness: Kyle Tucker

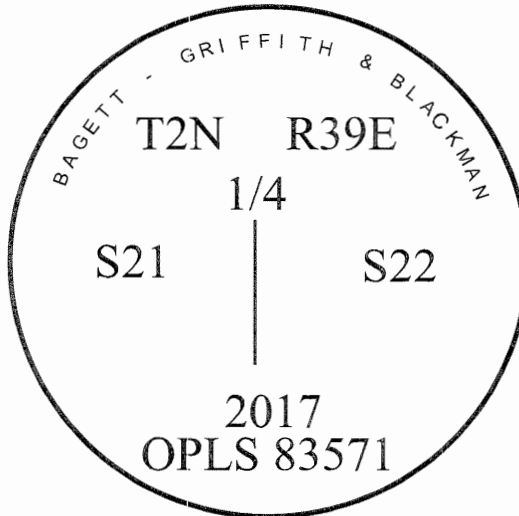

UNION COUNTY SURVEYOR
Date Received 6/22/17
Date Filed 6/22/17
Filed By [Signature]
File Number 015-2017R

I used a steel tape and magnetic compass in the establishment of the bearing trees. Magnetic declination used was 13° East. Bearings are to a brass washer marked OPLS 83571 in the lower blaze of the tree. Distance is to a spike set in the root crown of the side of the tree.