


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

None.

T 2 N R 39 E Q-01

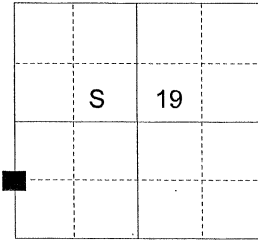

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

None

SEE SURVEY NUMBER 024-2013

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At position determined by survey, I set a 5/8"x30" iron pin with 2 1/2" aluminum cap, marked as shown below, 28 inches in the ground, from which:

A 6 inch White Fir bears South 73° West, a distance of 12.60 feet, marked S 1/6 S24 BT.

An 8 inch Ponderosa Pine bears South 29° East, a distance of 19.25 feet, marked S 1/16 S19 BT.


I hereby certify that the corner was monumented on May 15, 2013.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR



OREGON  
June 2, 2010  
JEFFREY S. HSU  
83571

Renewal Date: June 30, 2015

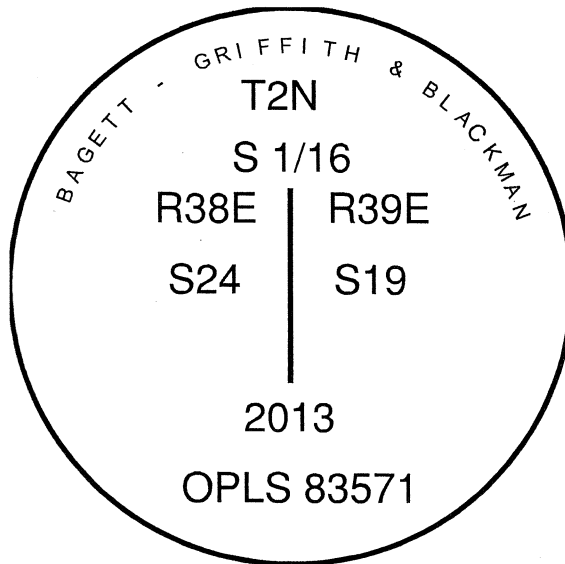

I used a steel tape and magnetic compass in the establishment of the accessories. I used 16° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing tree.

**UNION COUNTY  
SURVEYOR**

Date Received 6/3/13

Date Filed 6/3/13

Filed By MLG

File Number 414 2013R