


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by Rufus S. Moore under GLO contract number 382, dated March 23rd, 1881. GLO record states:

- Set post for cor to secs 19 and 30, from which:
- A tamarack 20 in. diam. bears N62°W, 41 lks. dist.
- A tamarack 15 in. diam. bears S53°W, 30 lks. dist.
- A tamarack 10 in. diam. bears S52°E, 31 lks. dist.
- A tamarack 15 in. diam. bears N9°W, 11 lks. dist.

T 2 N R 39 E R-01



**DESCRIPTION OF CORNER EVIDENCE FOUND:**

None

SEE SURVEY NUMBER 024-2013

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At proportionate position, I set a 2 ½"x30" aluminum pipe monument with 2 ½" aluminum cap, marked as shown below, 27 inches in the ground, from which:


- A 13 inch Ponderosa Pine bears North 28° East, a distance of 40.90 feet, marked T2N R39E S19 BT.
- A 10 inch White Fir bears South 15° East, a distance of 23.40 feet, marked T2N R38E S30 BT.
- An 11 inch Western Larch bears South 58° West, a distance of 20.60 feet, marked T2N R38E S25 BT.
- An 11 inch Douglas Fir bears North 8° West, a distance of 19.25 feet, marked T2N R38E S24 BT.

I hereby certify that the corner was monumented on May 14, 2013.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
June 2, 2010  
JEFFREY S. HSU  
83571

Renewal Date: June 30, 2015

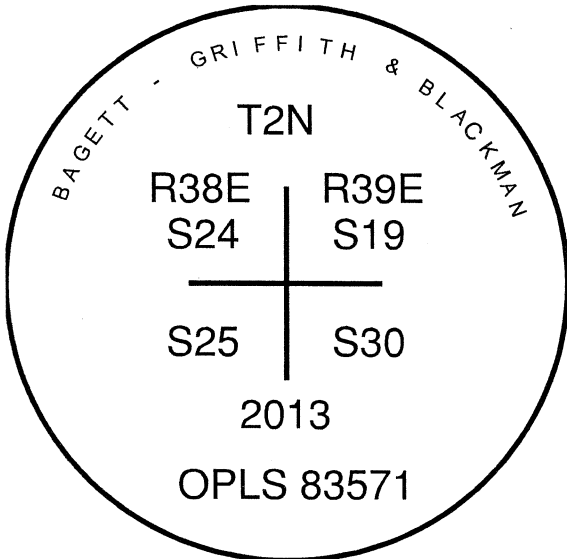

**UNION COUNTY  
SURVEYOR**

Date Received 6/3/13  
Date Filed 6/3/13  
Filed By [Signature]  
File Number 415-2013R

I used a steel tape and magnetic compass in the establishment of the accessories. I used 16° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing tree.