

1-70A

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by General Land office 1881 by contract survey;

The original notes state;

Set post for cor to Sec. 19.20.29,30 from which;


A fir 18" in diam bears N27°E 47 lks dist;

A fir 6" in diam bears N 76°W 28 lks dist;

A fir 7" in diam bears S41°W 17 lks dist;

A fir 7" in diam bears S23°E 17 lks dist;

R-5



Description of corner evidence found:

A fir 20" in diam bears S23°E 17 lks dist; Scribe visible.

A fir slap laying down with scrib marks visible was found and has been moved with a dozer.


REGISTERED
OREGON
LAND SURVEYOR

James G. Voelz
MAY 4, 1956
JAMES G. VOELZ
381

Description of monument and accessories I established to perpetuate the original location of this corner

At the position of the corner I set a 30" galvanized pipe with 8" plate welded to bottom and galvanized cap on top. The pipe set to a depth of 22" and back filled with tamped soil

I stamped the cap



From the pipe monument the original bearing tree is:
A fir 20" in diam bears S23°E 17 lks dist.

I also established new bearing trees as follows.

A tamarack 8" in diam bears N70°W 14.6' scribe T2N R39E S19 BT.

A fir 12" in diam bears N83°E 24' scribed T2N R39E S20 BT.

A fir 12" in diam bears S65°E 28.4' scribed T2N R39E S29 BT.

A fir 15" in diam bears S40°W 17.2' scribed T2N R39E S30BT;

Office of.....County..surveyor..... County of..... Union

State of.....Oregon....., I hereby certify that the within instrument was filed in this State for record on the 26 day of June, 1970, at 2 o'clock P.m., (signed)

.....County..surveyor..... by *James G. Voelz* (COUNTY OFFICIAL)

UNION COUNTY
SURVEYOR

Date Received _____

Date Filed _____

By _____

File No. 325-84R

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Rufus S. Moore under GLO contract number 382, dated March 23rd, 1881. GLO record states:

Set post for cor to secs 19, 20, 29 and 30, from which:


- A fir 18 in. diam. bears N27°E, 47 lks. dist.
- A Fir 6 in. diam. bears N76°W, 23 lks. dist.
- A Fir 7 in. diam. bears S41°W, 17 lks. dist.
- A Fir 7 in. diam. bears S23°E, 17 lks. dist.

In 1970, James Voelz monuments the corner to county standard from original GLO evidence. Union County monumentation record 325-84R states:

Found a fir 20" in diam. bears S23°E 17 lks dist, scribe visible. At the position of the corner I set a 30" galvanized pipe with 8" plate welded to bottom and galvanized cap on top. The pipe set to a depth of 22" and back filled with tamped soil. I establish the new bearing trees as follows:

- A tamarack 8" in diam bears N70°W 14.6' scribe T2N R39E S19 BT.
- A fir 12" in diam bears N83°E 24' scribed T2N R39E S20 BT.
- A fir 12" in diam bears S65°E 28.4' scribed T2N R39E S29 BT.
- A fir 15" in diam bears S40°W 17.2' scribed T2N R39E S30 BT.

T 2 N R 39 E R-05



DESCRIPTION OF CORNER EVIDENCE FOUND:

A 2 1/2" galvanized iron pipe with a 3" iron cap, marked as shown below, 8 inches above ground, from which:

- A 15 inch Douglas Fir bears North 87° East, a distance of 24.0 feet, alive and vigorous with scribe marks visible on an open blaze.
- A 20 inch Douglas Fir bears South 65° East, a distance of 28.4 feet, alive and vigorous with healed blaze.
- A 31 inch Douglas Fir bears South 35° West, a distance of 17.2 feet, alive and vigorous with healed blaze.

The Northwest bearing tree is a 6 inch tamarack, dead and downed, original position could not be ascertained.

Original GLO bearing tree, which is a 24 inch fir snag, bears South 28° East, a distance of 11 feet, with opened blaze. Inside is rotted and scribes can no longer be clearly seen.

SEE SURVEY NUMBER 024-2013

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

NEW BEARING TREE:

An 11 inch Douglas Fir bears North 33° West, a distance of 39.85 feet, marked T2N R39E S19 BT.


Corner falls 2 feet East of a North/South running fence.

I hereby certify that the corner was perpetuated on May 20, 2013.

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Jeffrey S. HSU
OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2015

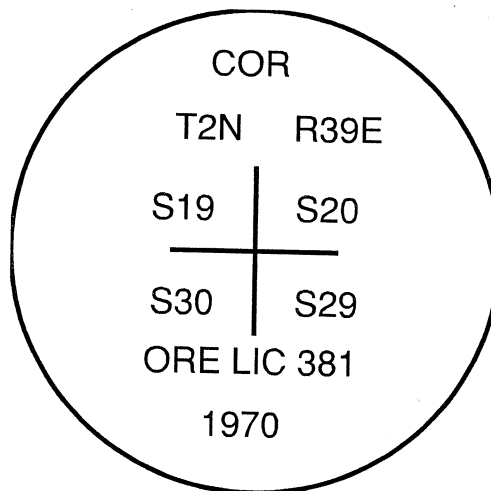

**UNION COUNTY
SURVEYOR**

Date Received 6/3/13

Date Filed 6/3/13

Filed By MLG/HSU

File Number 411-2013R

I used a steel tape and magnetic compass in the establishment of the accessories. I used 16° East declination, the distances are to a 60d spike driven into the right side of the root crown of the new bearing trees and to the center of the root crown on the old. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing tree.