

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Survey was performed by Moore & Thompson, Deputy Surveyor, under Contract No. 382, dated March 23, 1881

He set a post for the Section corner to sections 20, 21, 28 and 29 T 2 N R 39 E.


The bearing trees were:

A tamarack 15" dia. bears N 62 W, 33 lks. dist. scribed T 2 N R 39 E S 20 BT.

A tamarack 8" dia. bears N 46 E, 106 lks. dist. scribed T 2 N R 39 E S 21 BT.

A tamarack 22 " dia. bears S 64 E, 42 lks. dist. scribed T 2 N R 39 E S 28 BT

A tamarack 6" dia. bears S 38 W, 37 lks. dist. scribed T 2 N R 39 E S 29 BT.



Description of corner evidence found:

Found the stump of a 15" larch stump in section 20 with scribing on the face of the stump as per the GLO notes. Found evidence of a 22" dia. tamarack that fit the GLO record bearing and distance. No other evidence of the corner location.

Description of monument and accessories established to perpetuate the original location of this corner:

I set a stamped 2 1/2" brass cap on a 30" galv. iron pipe at the Section corner location by using the GLO calls from the existing bearing trees.

I then set new bearing trees as follows:

A Doug fir 10" dia. bears N 46 W, 37.9 feet scribed T 2 N R 39 E S 20 BT.

A larch 14" dia. bears N 52 E, 45.4 feet scribed T 2 N R 39 E, S 21 BT.

A Doug fir 16" dia. bears S 81 E, 35.5 feet scribed T 2 N R 39 E S 28 BT.

A larch 11" dia. bears S 61 W, 35.9 feet scribed T 2 N R 39 E S 29 BT.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

James H. Hambleton
3-20-78

OREGON
JULY 10, 1964
JAMES H. HAMBLETON
645

Office of..... County of.....

State of..... I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19....

..... by.....
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY
SURVEYOR**

Date Received _____

☆ GPO 798-276

Date Filed _____

By _____

File No. 283-83R

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner originally established by Rufus S. Moore under GLO contract number 382 dated March 23, 1881. Surveyor General record states:


Set post for cor. to secs. 20,21,28, and 29 from which:

- A Tamarack, 8" diam. bears N46°E, 106 lks. dist.
- A Tamarack, 15" diam. bears N62°W, 33 lks. dist.
- A Tamarack, 6" diam. bears S38°W, 37 lks. dist.
- A Tamarack, 22" diam. bears S64°E, 42 lks. dist.

In 1978 corner evidence was found by James H. Hambleton OPLS 645. Union County Monumentation record states: "Found the stump of a 15" larch in section 20 with scribing on the face of the stump as per the GLO notes. Found evidence of a 22" dia. tamarack that fit the GLO record bearing and distance. No other evidence of the corner location. He then set a stamped 2 1/2" brass cap on a 30" galv. iron pipe at the corner at record distance and bearing from the bearing trees from which:

- A Douglas Fir 10" dia. bears N46°W, 37.9 feet scribed T2NR39ES20 BT
- A Larch 14" dia. bears N52°E, 45.4 feet scribed T2NR39ES21 BT
- A Douglas Fir 16" dia. bears S81°E, 35.5 feet scribed T2NR39ES28 BT
- A Larch 11" dia. bears S61°W, 35.9 feet scribed T2NR39ES29 BT

T 2 N R 39 E R-09



DESCRIPTION OF CORNER EVIDENCE FOUND:

Found an iron pipe with 2 1/2" brass cap marked as shown from which:

- A stump 20" dia., 8" tall, bears North 46° West, a dist. of 37.9 feet with healed blaze.
- A Tamarack stump 16" dia., 7' tall, bears North 52° East, a dist. of 45.4 feet with healed blaze.
- A Douglas Fir stump 25" dia., 5' tall, bears South 81° East, a dist. of 35.5 feet with healed blaze.
- A Larch stump 11" dia., 20" tall, bears South 61° West, a dist. of 35.9 feet with "BT" scribes visible on open blaze.
- A badly decayed 14" stump, 3' long, bears North 62° West, a dist. of 21.2 feet to base of stump with "S20 BT" scribes visible.
- Valsetz Lumber location poster bears North a dist. of 30.45 feet.
- Monument falls 2' North and 4' West of fence corner from which fences bear North, West, and East.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

From the iron pipe monument:

NEW BEARING OBJECTS:

- A 4" White Fir bears North 50° East, a dist. of 13.40 feet marked X BT.
- A 5" Douglas Fir bears South 49° East, a dist. of 18.80 feet marked T2NR39ES28 BT.
- A 5" Douglas Fir bears South 64° West, a dist. of 11.95 feet marked T2NR39ES29 BT.
- A 6" Douglas Fir bears North 77° West, a dist. of 11.45 feet marked T2NR39ES20 BT.

I hereby certify that the corner was perpetuated on February 8, 2018.

Witness: Kyle Tucker

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
June 2, 2010
JEFFREY S. HSU
83571


**UNION COUNTY
SURVEYOR**

Date Received 3/6/18

Date Filed 3/6/18

Filed By N. L. G. Hsu

File Number 004-2018R

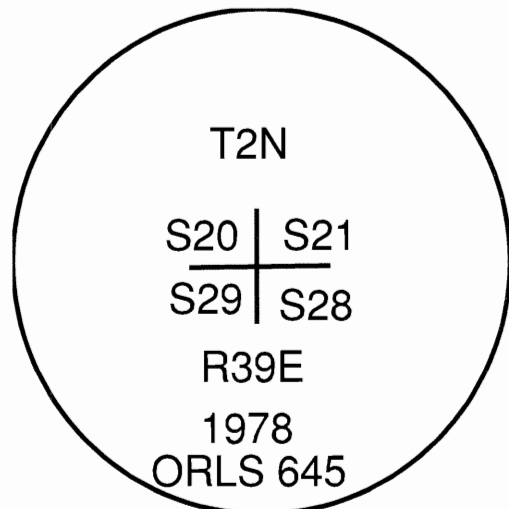

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 13° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2018018

SECTION CORNER COMMON TO SECTIONS 20, 21, 28 AND 29

TWP. 2 N RGE. 39 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: February 8, 2018

LAT: 45 ° 37 ' 52.12275 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 117 ° 57 ' 9.85158 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 726475.593 INT FT.

E: 8853605.919 INT FT.

TYPE: GPS

THETA: 1 ° 48 ' 23.3410321 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999271293

ELEV: 3337.88 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

2 1/2" Iron pipe with 2 1/2" brass cap marked as shown.

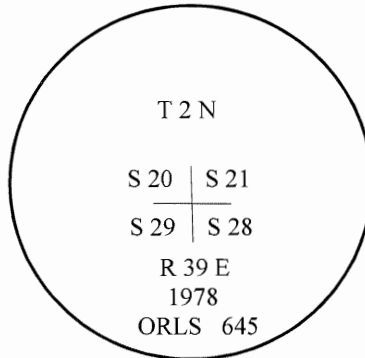

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2018

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)