

"P"


CERTIFIED RECORD OF LAND CORNER MONUMENTAL

History of original corner establishment:

1/4 corner common to Sections 24 & 25, T2N, R39E, W.M., Union County, Oregon

Original corner established in 1881 by R. Moore under contract No. 382 approved 3/23/1881. He set a basalt stone 24"x18"x5" from which:

- A Pine 32" in diameter bears N20°E, 91 Lks. distance.
- A Pine 30" in diameter bears S23°W, 19 Lks. distance.

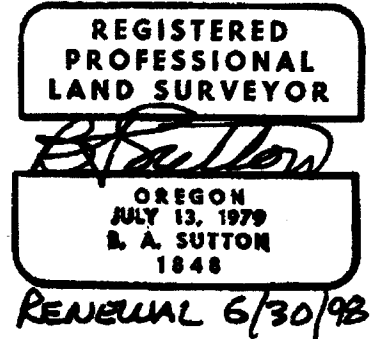


Description of corner evidence found:

No original corner evidence found. Found dead & down 40" Pine badly decayed bears N20°E, 91 Lks.

Description of monument and accessories I established to perpetuate the original location of this corner:

I set a 5/8" iron rod with a 1-1/2" aluminum cap marked: at S20°W, 91 Lks. from the above described original reference.

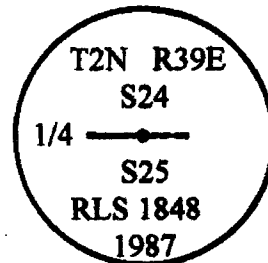

I established the following references:

- A 12" Ponderosa Pine bears N73°45'W, 52.8' blazed & scribed (1/4S24BT)
- A 22" Apple tree bears S38°30'W, 19.9' blazed & scribed (1/4S25BT)

Office of the _____ County Surveyor _____ County of _____ Union

State of Oregon, I hereby certify that the within instrument was filed in this office

for record on the _____ day of _____, 19

_____ by _____
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR	
Date Received	<u>9/16/86</u>
Date Filed	<u>10/5/86</u>
By	<u><i>Lynn T. Slaw</i></u>
File No.	<u>106-1996K</u>