


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

S-8

History of original corner establishment:

Corner not previously set



Description of corner evidence found:


None

See map of survey number 1-81, as recorded in the office of the Union County Surveyor.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the intersection of the line between the CN 1/16 and the N 1/16 and the line between the E 1/16 and the CE 1/16 all in section 29 I set a 1" x 30" galvanized iron pipe with brass cap marked as shown, from which:

- A 16" pine bears S 39° W, 14.3 ft marked NE 1/16 S29 BT
- A 14" red fir bears S 62° E, 6.4 ft marked NE 1/16 S29 BT.

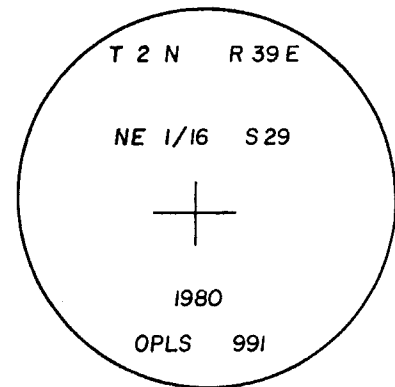

REGISTERED PROFESSIONAL LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

I used a steel tape and a magnetic compass set with 20° E declination. I set a brass washer marked OPLS 991 at the BT blaze.

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 (COUNTY OFFICIAL) by (DEPUTY)

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____ ☆ GPO-798-276

By _____

File No. 289-83R