


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHED:**

Corner not previously established.

T 2 N R 39 E S-15

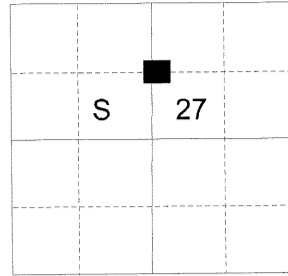

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

None.

SEE SURVEY NUMBER 025-2014

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At position determined by survey, I set a 5/8" x 30" iron pin, 27 inches in the ground, with 2 1/2" aluminum cap marked as shown below, from which:

A 10 inch Ponderosa Pine bears South 23° East, a distance of 66.20 feet, marked CN 1/16 S27 BT.

A 6 inch Ponderosa Pine bears North 79° West, a distance of 39.15 feet, marked CN 1/16 S27 BT.

Set a steel fencepost approximately 1 foot North of corner monument. Corner falls approximately 17 feet East and 4 feet South of a fence corner.

I hereby certify that the corner was monumented on August 28, 2014.

Witness: Thomas J. Kopp


**UNION COUNTY SURVEYOR**

Date Received 9/9/14

Date Filed 9/9/14

Filed By H. G. Min

File Number 036-2014R

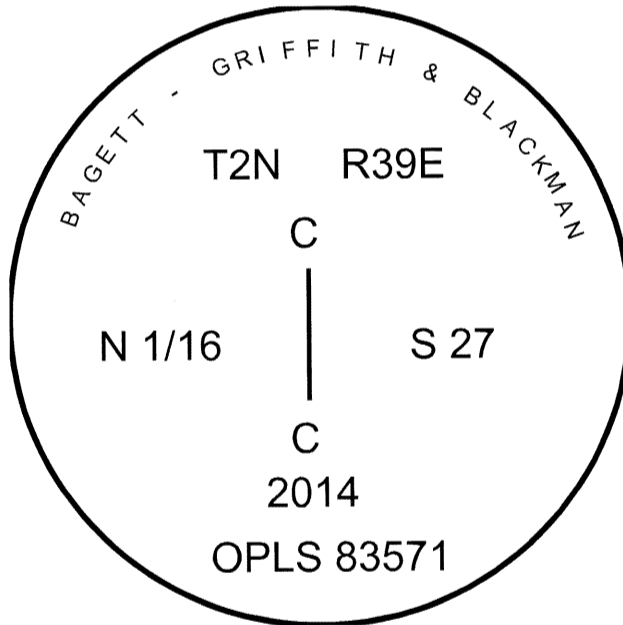

**REGISTERED PROFESSIONAL LAND SURVEYOR**

*[Signature]*

OREGON  
June 2, 2010

JEFFREY S. HSU  
83571

Renewal Date: June 30, 2015

I used a steel tape and magnetic compass in the establishment of the accessories. I used 16° East declination. The distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the bearing trees.