

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner originally established by Rufus Moore in GLO contract no. 382, dated March 23, 1881. Surveyor General field notes state:


Set post for 1/4 Sec. Cor, from which:
A pine 4 in. diam. bears N57°W, 9 lks. dist.
A fir 4 in. diam., bears S55°E, 18 lks. dist.

In Survey Number 82-78, James Hambleton monuments the corner from a topographic call.

In Survey Number 33-79, Barry Barbour rejects the monument set by Hambleton and places the corner by proportionate position. He sets a 2 1/2" x 30" pipe with brass cap, from which:

A 24" Fir bears N77°E, 41.9 ft.
A 14" Fir bears S37°W, 51.0 ft.
The 5/8" rebar, (set by Hambleton) bears N41°E, 13.2 ft.

T 2 N R 39 E T-13



DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a 2 1/2" iron pipe, with 2 1/2" brass cap marked as shown below, 10 inches above ground, in a mound of stone 2 ft. diam., from which:
A 5/8" rebar bears North 41° East, a distance of 13.2 feet.
A 30" stump bears North 77° East, a distance of 42 feet, with healed blaze evident.
A 20" White Fir bears South 37° West, a distance of 51.0 feet, alive and vigorous with healed blaze.

SEE SURVEY NUMBER 025-2014

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

From the iron pipe monument,


NEW BEARING TREES:

A 17" Douglas Fir bears South 12° East, a distance of 41.05 feet, marked 1/4 S27 BT.
A 4" Douglas Fir bears North 69° West, a distance of 7.75 feet, marked 1/4 S28 BT.

Corner falls 5 feet East of an North/South fenceline.
I hereby certify that the corner was perpetuated on August 13, 2014.

Witness: Thomas J. Kopp

UNION COUNTY SURVEYOR
Date Received 9/9/14
Date Filed 9/9/14
Filed By [Signature]
File Number 038-2014R

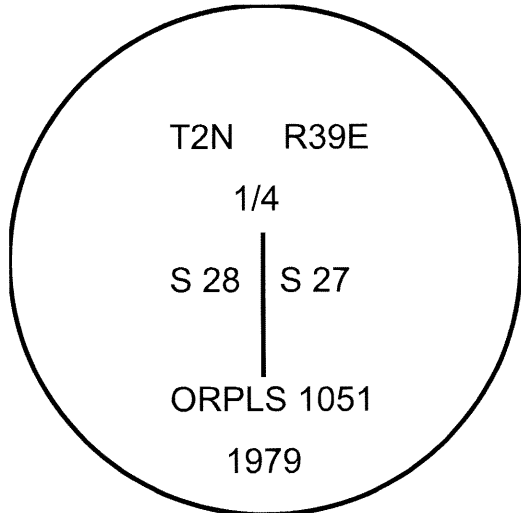

REGISTERED PROFESSIONAL LAND SURVEYOR
[Signature]
OREGON June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2015

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 16° East declination. The distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.