


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner established by James Voelz in Survey Number 6-70.

T 2 N R 39 E T-14

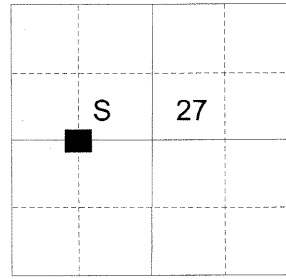

DESCRIPTION OF CORNER EVIDENCE FOUND:

None.

SEE SURVEY NUMBER 025-2014

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 5/8" x 6" iron pin, 4 inches in the ground, to bedrock, with 2 1/2" aluminum cap marked as shown below, in a collar of stone 1 ft. diam., from which:


A 10 inch Ponderosa Pine bears North 28° East, a distance of 34.50 feet, marked CW 1/16 S27 BT.

A 4 inch Western Larch bears South 12° West, a distance of 37.70 feet, marked CW 1/16 S27 BT.

Set a steel fencepost approximately 1 foot North of the corner monument.
I hereby certify that the corner was monumented on August 26, 2014.

Witness: Thomas J. Kopp

UNION COUNTY SURVEYOR	
Date Received	9/9/14
Date Filed	9/9/14
Filed By	Neil Galbraith
File Number	039-2014R

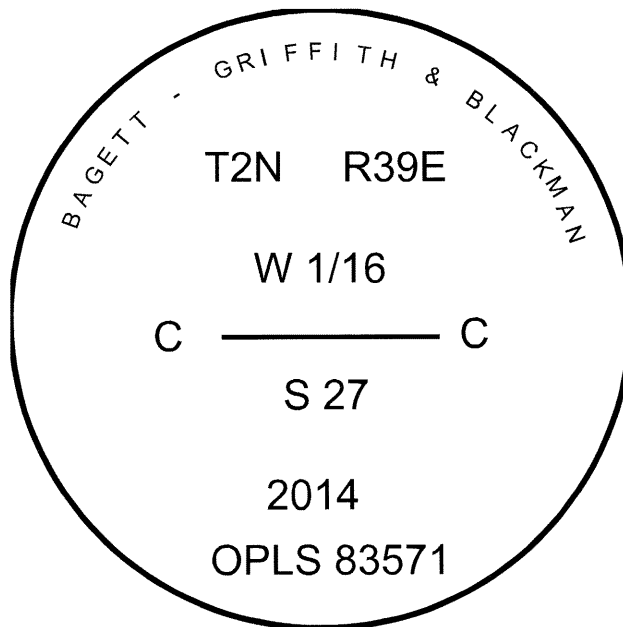

REGISTERED PROFESSIONAL LAND SURVEYOR
OREGON June 2, 2010 JEFFREY S. HSU 83571

Renewal Date: June 30, 2015

I used a steel tape and magnetic compass in the establishment of the accessories. I used 16° East declination. The distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the bearing trees.