

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


V-5

**History of original corner establishment:**

Corner originally set in 1881 by Rufus S. Moore under Government Contract No. 382. Surveyor General Notes state:

Set post for corner to sections 29, 30, 31 and 32 from which BTs:

- A tamarack 10" diameter bears S 35° W, 40 links dist.
- A tamarack 14" diameter bears S 22° E, 13 links dist.
- A fir 9" diameter bears N 43° E, 16 links dist.
- A fir 9" diameter bears N 56° W, 36 links dist.



No subsequent re-survey found in records.

**Description of corner evidence found:**

None.


See survey number 1-81 as recorded in the office of the Union County surveyor

**Description of monument and accessories I established to perpetuate the original location of this corner:**


At proportionate distances, I set a 1" x 30" iron pipe with brass cap marked as shown, 26" in the ground.

**New BTs**


- A 12" tamarack bears N 50° W, 48.5 ft  
marked T2N R39E S30 BT
- A 14" tamarack bears S 47° W, 13.5 ft  
marked T2N R39E S31 BT
- A 16" tamarack bears S 64° E, 33.3 ft  
marked T2N R39E S32 BT
- A 16" red fir bears N 63° E, 29.4 ft  
marked T2N R39E S29 BT

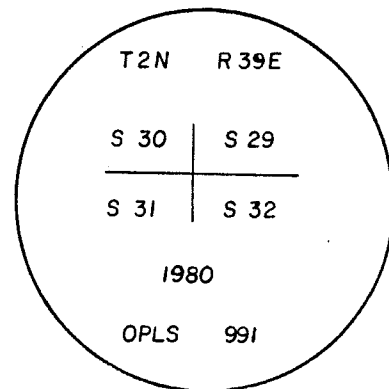

I used a steel tape and magnetic compass with 20° E declination. I set a brass washer marked OPLS 991 at the BT blaze.



*Gregory T. Blackman*



Office of..... County of.....  
 State of..... I hereby certify that the within instrument was filed in the office  
 for record on the..... day of....., 19.....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY SURVEYOR**

Date Received ☆ GPO-798-276 \_\_\_\_\_

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 294-83R

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHED:**

Corner originally established by Rufus S. Moore under GLO Contract Number 382, dated March 23, 1881. Surveyor General record states:


Set post for cor. to secs. 29, 30, 31 & 32. From which:

- A Tamarack 10 in. diam, bears S 35° W, 40 lks. dist.
- A Tamarack 14 in. diam, bears S 22° E, 13 lks. dist.
- A Fir 9 in. diam, bears N 43° E, 16 lks. dist.
- A Fir 9 in. diam, bears N 56° W, 36 lks. dist.

In Survey #1-81, Greg Blackman set a 1" x 30" iron pipe with a brass cap marked as shown below at proportionate position. From which:

- A 12" Tamarack bears N 50° W, 48.5 ft. Marked T2N R39E S30 BT.
- A 14" Tamarack bears S 47° W, 13.5 ft. Marked T2N R39E S31 BT.
- A 16" Tamarack bears S 64° E, 33.3 ft. Marked T2N R39E S32 BT.
- A 16" Tamarack bears N 63° E, 29.4 ft. Marked T2N R39E S29 BT.

T 2 N R 39 E V-05



**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found a 1" iron pipe with 2" brass cap, marked as shown below, 8" above ground, from which:

- A 20 inch Western Larch bears South 64° East, a distance of 33.3 feet, alive and vigorous with a healed blaze.
- An 18 inch Western Larch bears South 47° West, a distance of 13.5 feet, alive and vigorous with a healed blaze.
- No evidence of other previous corner accessories.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

**NEW BEARING OBJECTS:**

- A 17" White Fir bears N 14° E, a distance of 24.80 feet, marked T2N R39E S29 BT.
- A 9" White Fir bears N 51° W, a distance of 14.50 feet, marked T2N R39E S30 BT.

I hereby certify that the corner was perpetuated on May 19, 2014.


Witness: Thomas J. Kopp

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR



OREGON  
June 2, 2010  
JEFFREY S. HSU  
83571

Renewal Date: June 30, 2015

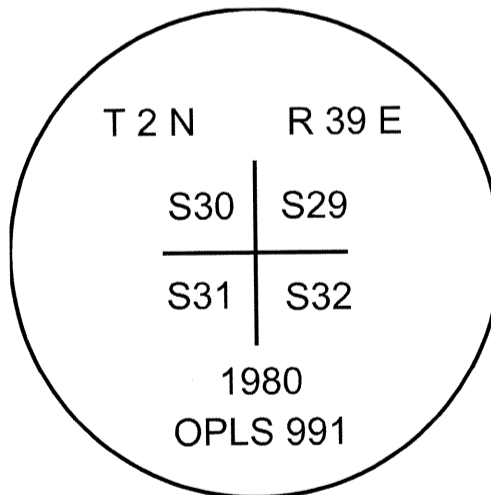

**UNION COUNTY  
SURVEYOR**

Date Received 5/23/14

Date Filed 5/23/14

Filed By [Signature]

File Number 015-2014R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 16° East declination, the distances are to a 60d spike driven into the right side of the root crown of the new bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2018029

SECTION CORNER COMMON TO SECTIONS 29, 30, 31 AND 32

TWP. 2 N RGE. 39 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: August 29, 2018

LAT: 45 ° 36 ' 58.70821 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 117 ° 58 ' 24.26414 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 720902.245 INT FT.

E: 8848490.063 INT FT.

TYPE: GPS

THETA: 1 ° 47 ' 30.5686821 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999250714

ELEV: 3207.83 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

2" brass cap on 1" iron pipe set  
8" above ground level, with cap marked  
as shown.

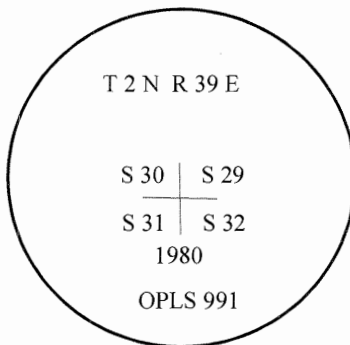

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*

OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date: December 31, 2018

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)