


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

V-86

History of original corner establishment:

Corner not previously set

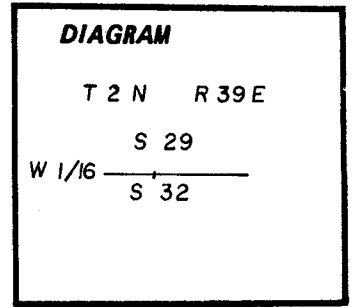

Description of corner evidence found:

Corner not previously set


See survey number 1-81 as filed in the office of the Union County surveyor

Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance I set a 1" x 30" iron pipe with brass cap marked as shown 28" in the ground.

New BTs

- A 21" tamarack bears N 16° W, 14.5 ft marked W1/16 S29 BT
- A 18" spruce bears S 32° W, 21.2 ft marked W1/16 S32 BT

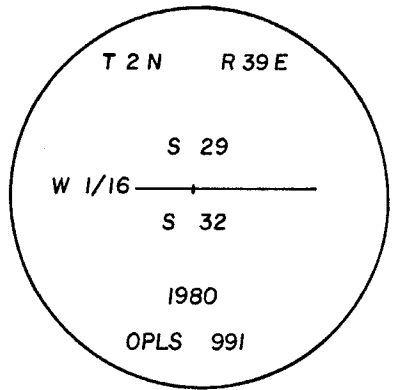

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Gregory T. Blackman*

OREGON  
JULY 13, 1973  
GREGORY T. BLACKMAN  
991

I used a steel tape and magnetic compass with 20° E declination. I set a brass washer marked O.P.E.S. 991 at the B.T. blaze.

Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

**UNION COUNTY SURVEYOR**

Date Received \_\_\_\_\_

Date Filed \_\_\_\_\_ ☆ GPO-790-276

By \_\_\_\_\_

File No. 296-83R